




## Ewon Flexy 205 - White label

Item number: FLEXY20593\_00MA

The Ewon Flexy is a multipurpose IIoT data gateway that allows machine builders and users to monitor and collect vital KPIs for analysis and predictive maintenance. Gather data from PLCs, sensors and other devices thanks to the support of a wide range of industrial protocols, including OPC UA.

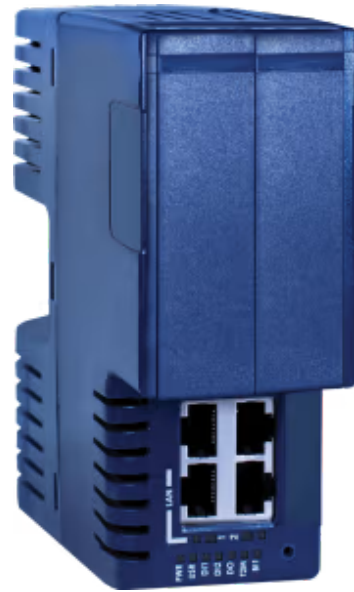

*Industrial VPN gateway for IIoT data collection & monitoring*

### Features and benefits

- ✓ **Easily acquire and log data**  
Gather data from PLCs, sensors and other devices thanks to the support of a wide range of industrial protocols, including OPC UA.
- ✓ **Implement efficient data monitoring**  
The Ewon Flexy supports all major PLC protocols for data logging & alarms. Local web-dashboard for KPIs monitoring through Talk2m's M2web service. OPC UA server to share data with Enterprise Systems.
- ✓ **Do more with built-in connectors and APIs**  
You might not have a data application today. But when the time comes, be confident in the fact that you can connect to a local or cloud data solution and make your machine smarter.
- ✓ **Extended data services**  
Wide range of possibilities: PLC data acquisition, alarms, OPC UA, Modbus, MQTT, SNMP, HTTPs, local web-dashboards, cloud live KPIs, and programming (Basic & Java).
- ✓ **Enable machine remote connectivity**  
Enjoy VPN remote access for PLC troubleshooting. The included Talk2m cloud's global infrastructure is redundant and reliable. Setup your device in minutes for unrivalled connectivity success.
- ✓ **Leverage flexible data integration**  
Full flexibility to send data to any server. Multiple IoT connectors, and MQTT/HTTPS through embedded Basic or Java scripting engine. Talk2m Data Services with APIs for third party software integration.
- ✓ **Future-proof thanks to extension cards**  
Discover the interchangeable extension cards of the Ewon Flexy: WiFi, 3G, 4G, USB, Ethernet WAN. These allow you to easily keep up with the evolution of communication technologies.
- ✓ **OPC UA ready**  
Ewon Flexy gateways support OPC UA, a modern protocol for industrial automation. It enables easy machine connectivity, asset modernization, and secure data collection from the factory floor.



# Ewon Flexy 205 - White label

General	
Net Width (mm)	55
Net Height (mm)	133
Net Depth (mm)	122
Net Weight (g)	122
Packed Width (mm)	295
Packed Height (mm)	180
Packed Depth (mm)	57
Packed Weight (g)	184
Operating Temperature °C Min	-25
Operating Temperature °C Max	+60
Storage Temperature °C Min	-30
Storage Temperature °C Max	+70
Relative Humidity	10 to 95% relative humidity (non-condensing).
Input Voltage (V)	12-24VDC+/-20%, LPS。消费：取决于安装的扩展卡（请参阅我们网站上的安装指南）。
Power Connector	9-pole
Configuration	Web-Based configuration: Embedded web interface with setup wizards for configuration and maintenance (no extra software needed). Authentication with login/password and user management capability. Possibility of uploading custom web GUI.
Content of Delivery	This product consists of the following components: an industrial gateway in a plastic housing, a power connector, 2 pcs of Flexy blank extension front plates, a start-up guide document in paper version, legal references in paper version and a cardboard box.
Not Included (in delivery)	Any variant of extension boards and their accessories (antenna, cable)
Mounting	DIN rail mount (bracket included), Wall mount



# Ewon Flexy 205 - White label

## General

<b>Housing Materials</b>	Plastic
<b>Packaging Material</b>	Cardboard
<b>Warranty (years)</b>	3
<b>PLC Compatibility</b>	Rockwell Automation/Allen Bradley, Siemens, Schneider Electric, Mitsubishi Electric, Vipa, Omron, Hitachi

## Identification and Status

<b>Product ID</b>	FLEXY20593_00MA
<b>Model Code</b>	02801
<b>Country of Origin</b>	Belgium
<b>HS Code</b>	8517620000
<b>Export Control Classification Number (ECCN)</b>	5A992.c
<b>Supply Risk Factor ERP</b>	Volume not defined yet
<b>Purchasing Multiple ERP</b>	5

## Physical Features

<b>Connectors / Input / Output</b>	4 x RJ45 Ethernet port: 10/100 Mb. Configurable LAN/WAN ports, port 1 always LAN, 2x Digital input: 0 to 12/24VDC; 1.5kV isolation, 1x Digital output: open drain (MOSFET) 200mA; 1.5 kV isolation.
------------------------------------	---

## Certifications and Standards

<b>Environment</b>	Temperature - Operating & Storage tested according to: IEC 60068-2-1 Cold test, IEC 60068-2-2 Dry heat test, IEC 60068-2-14 Change of temperature, IEC 60068-2-30 Cyclic damp heat test
<b>Vibration and Shock</b>	Vibration & shocks tested according to: IEC 60068-2-27 Bumps, IEC 60068-2-64 Vibration (broad-band random), IEC 60068-2-6 Vibration (sinusoidal)
<b>WEEE Category</b>	IT and telecommunications equipment
<b>Other Certification</b>	Giteki Japan, Russia FSS notification