




Anybus ProfiHub B4FOR+ (Multi-Mode)

Item number: 17430

The ProfiHub B4FOR+ is a cost-effective solution to link PROFIBUS fiber optic to multiple RS 485 segments and vice versa allowing ring topologies.

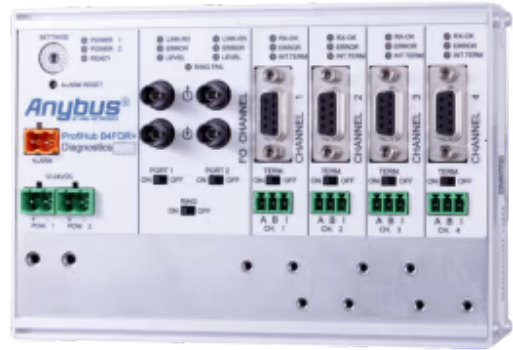

Redundant network expansion over long distances

Features and benefits

- ✓ **One fiber optic channel, divided into 2 ports**
Allowing creation for additional redundancy on the ring
- ✓ **Ring redundancy**
Strengthen the backbone of your network by creating additional redundancy via a ring topology
- ✓ **4 galvanically isolated channels**
Avoid daisy chained network interruptions

Anybus ProfiHub B4FOR+ (Multi-Mode)



General	
Net Width (mm)	111
Net Height (mm)	167
Net Depth (mm)	40
Net Weight (g)	713
Packed Width (mm)	13
Packed Height (mm)	20
Packed Depth (mm)	24
Packed Weight (g)	816
Operating Temperature °C Min	-25
Operating Temperature °C Max	70
Current Consumption Type Value at Vcc Nom (mA)	250 mA
Current Consumption Max value at Vcc nom (mA)	250 mA
Input Voltage (V)	9...31 VDC
Power Wire Diameter (mm)	< 2.5 mm ²
Warranty (years)	1 Year
Identification and Status	
Product ID	17430
Country of Origin	Netherlands (the)
HS Code	8471800000
Export Control Classification Number (ECCN)	EAR99

Anybus ProfiHub B4FOR+ (Multi-Mode)



Identification and Status

Supply Risk Factor ERP	Volume not defined yet
Purchasing Multiple ERP	1

Certifications and Standards

Protection Class IP	IP20
WEEE Category	IT and telecommunications equipment