

Midea Commercial & VRF systems to Modbus RTU Interface

Item number: INMBSMID001I000

The Midea-Modbus interface allows full bidirectional communication between Midea Commercial and VRF systems and Modbus RTU (RS-485) networks. The interface acts as a server device for the installation, accessing all signals from the air conditioner unit..



Midea to Modbus - 1 indoor unit

Features and benefits

- ✓ **Modbus RTU (EIA-485) server device**
The interface acts as a Modbus server device through its Modbus RTU (EIA-485 connector) port.
- ✓ **Energy savings through a window contact function**
This function helps minimize costs, as HVAC systems are a major building energy consumer.
- ✓ **AC unit control by both the remote and Modbus RTU**
The AC unit can be simultaneously controlled by the manufacturer's remote controller and Modbus RTU.
- ✓ **Dual configuration options**
Configuration is carried out through the interface's onboard DIP switches and the Modbus interface.
- ✓ **Total unit control and monitoring from Modbus RTU**
Through internal variables, running hours counter (for maintenance purposes), and error indication.
- ✓ **Multiple mounting options**
Mounting options include DIN rail, wall, or, in some AC models, even inside the indoor unit.

Midea Commercial & VRF systems to Modbus RTU Interface



| General | |
|---|--|
| Net Width (mm) | 53 |
| Net Height (mm) | 58 |
| Net Depth (mm) | 93 |
| Net Weight (g) | 90 |
| Operating Temperature °C Min | 0 |
| Operating Temperature °C Max | 60 |
| Input Voltage (V) | From the AC unit. |
| Power Connector | Other |
| Capacity | 1 indoor unit. |
| Installation Conditions | This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit. |
| Content of Delivery | Intesis Gateway, Installation Manual, AC Connection cable. |
| Mounting | DIN rail mount (bracket included), Wall mount |
| Housing Materials | Plastic |
| Warranty (years) | 3 years |
| Packaging Material | Cardboard |
| Identification and Status | |
| Product ID | INBBSMID001I000 |
| Country of Origin | Spain |
| HS Code | 8517620000 |
| Export Control Classification Number (ECCN) | EAR99 |

Midea Commercial & VRF systems to Modbus RTU Interface



Identification and Status

| | |
|-------------------------|------------------------|
| Supply Risk Factor ERP | Volume not defined yet |
| Purchasing Multiple ERP | 1 |

Physical Features


| | |
|-----------------------------|------------------------------------|
| Connectors / Input / Output | EIA-485, AC port. |
| DIP & Rotary Switches | EIA-485 serial port configuration. |

Certifications and Standards

| | |
|---------------------|-------------------------------------|
| ETIM Classification | EC001604 |
| WEEE Category | IT and telecommunications equipment |



Use Case

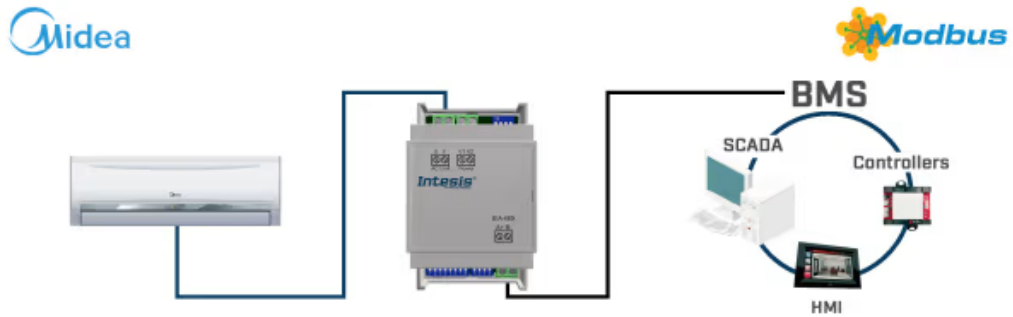

Integration example.