


## LonWorks TP/FT-10 to BACnet/IP & MS/TP Server Gateway

Item number: INBACLON2500000

Integrate any LON device or installation with a BACnet BMS or any BACnet/IP or BACnet MS/TP controller. This integration aims to make LON devices, their network variables (SNVT), and resources accessible from a BACnet-based control system or device as if they were a part of the BACnet system and vice versa.

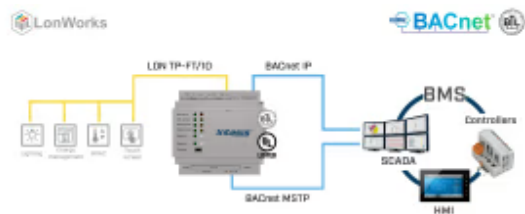

*LonWorks TP/FT-10 to BACnet/IP & MS/TP - 250 points*

### Features and benefits

- ✓ **Support for both BACnet/IP and BACnet MS/TP**  
The gateway supports both BACnet/IP and BACnet MS/TP protocols.
- ✓ **Commissioning-friendly approach with Intesis MAPS**  
Templates can be imported and reused as often as needed, significantly reducing commissioning time.
- ✓ **Configuration through IP (Console) port**  
Configuration can be carried out through the gateway's IP (Console) port.
- ✓ **Can be configured to Modbus TCP instead of BACnet**  
The gateway is highly versatile, as it can be configured to work with Modbus TCP instead of BACnet.
- ✓ **Easy integration with Intesis MAPS**  
The integration process is quickly and easily managed using the Intesis MAPS configuration tool.
- ✓ **Configuration tool and gateway automatic updates**  
Both the Intesis MAPS configuration tool and the gateway's firmware can receive automatic updates.
- ✓ **Support for LonWorks TP/FT-10 devices**  
The gateway supports LonWorks TP/FT-10 (twisted pair free topology at 78 kbps) devices.
- ✓ **Control up to 3000 SNVT / UNVT LonWorks variables**  
Up to 3000 SNVT/UNVT LonWorks variables can be controlled by the gateway.

# LonWorks TP/FT-10 to BACnet/IP & MS/TP Server Gateway



General	
Net Width (mm)	88
Net Height (mm)	56
Net Depth (mm)	90
Net Weight (g)	194
Packed Width (mm)	127
Packed Height (mm)	86
Packed Depth (mm)	140
Packed Weight (g)	356
Operating Temperature °C Min	0
Operating Temperature °C Max	60
Input Voltage (V)	9 to 36VDC +/-10%, Max.: 140mA.
Power Connector	3-pole
Capacity	Up to 250 points.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway, Installation Manual, USB Configuration cable.
Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Warranty (years)	3 years

# LonWorks TP/FT-10 to BACnet/IP & MS/TP Server Gateway



## General

<b>Packaging Material</b>	Cardboard
---------------------------	-----------

## Identification and Status

<b>Product ID</b>	INBACLON2500000
-------------------	-----------------

<b>Country of Origin</b>	Spain
--------------------------	-------

<b>HS Code</b>	8517620000
----------------	------------

<b>Export Control Classification Number (ECCN)</b>	EAR99
--	-------

<b>Supply Risk Factor ERP</b>	Volume not defined yet
-------------------------------	------------------------

## Physical Features

<b>Connectors / Input / Output</b>	Power supply, LON TP/FT-10, Ethernet, Console port USB, USB storage, EIA-485.
------------------------------------	---

<b>LED Indicators</b>	Gateway and communication status.
-----------------------	-----------------------------------

<b>DIP &amp; Rotary Switches</b>	EIA-485 serial port configuration.
----------------------------------	------------------------------------

<b>Battery Description</b>	Manganese Dioxide Lithium button battery.
----------------------------	---


## Certifications and Standards

<b>ETIM Classification</b>	EC001604
----------------------------	----------

<b>WEEE Category</b>	IT and telecommunications equipment
----------------------	-------------------------------------



## Use Case

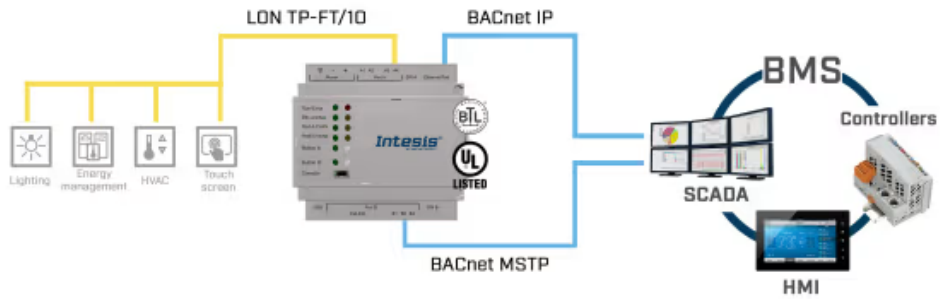

Integration example.