

Anybus Communicator – Ethernet to PROFIBUS DP Device ATEX

Item number: ABC4091EX-A

The Anybus Communicator Ethernet to PROFIBUS DP device ATEX enables you to connect any Ethernet control system to any PROFIBUS DP control system. Anybus Communicators ensure reliable, secure, high-speed data transfers between different industrial networks. Thanks to our intuitive web-based user interface, they're also incredibly easy to use.



A protocol converter that connects Ethernet and PROFIBUS DP control systems

Features and benefits

✓ Certified for hazardous locations

The Communicator is certified for ATEX Zone 2 and UL hazardous location Class 1 Division 2.

✓ Instant data transfer

Instant data transfer lets you take advantage of high-speed industrial networks.

✓ Intuitive user interface

Use the intuitive web-based user interface to easily configure the Communicator via the drag-and-drop functionality or to analyze live data and generate support packages.

✓ Optimized hardware design

The Communicator has forward-facing ports and is designed for IP20 and DIN-rail mounting, enabling you to install it with ease, close to connected devices, thereby reducing wiring requirements.

✓ 5-year warranty

Thanks to carefully selected industrial components the Communicator operates reliably in harsh environments, ensuring uptime and longevity. Our confidence in quality is reflected in a 5-year warranty.

✓ High performance

Powered by the award-winning NP40 network processor, it enables instant transfer of up to 1500 bytes (network dependent) between networks, totaling 3000 bytes.

✓ Endian conversion

The Communicator provides hardware-accelerated endian conversion (byte swap), saving processing time on the PLC.

✓ Cybersecurity

Despite advanced security, human error often causes breaches. Our Communicator's physical security switch can lock configurations and block web interface access, enhancing security.

✓ Diagnostics

The user interface displays real-time connection status and I/O data mapping for easy troubleshooting. Easily generate a support file containing all the necessary information.

✓ Life cycle management

HMS maintains every part of the Communicator, including network updates, throughout the product's lifecycle.

Anybus Communicator – Ethernet to PROFIBUS DP Device ATEX



General

Net Width (mm)	27
Net Height (mm)	144
Net Depth (mm)	98
Net Weight (g)	150
Packed Width (mm)	12
Packed Height (mm)	2
Packed Depth (mm)	8
Packed Weight (g)	185
Operating Temperature °C Max	70
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Power Connector	3-pin, 5.08 Phoenix plug connector
Isolation	TRUE
Mounting	DIN-rail (EN 50022 standard)
Housing Materials	PC ABS, UL 94 VO
Packaging Material	Cardboard
Warranty (years)	5

Identification and Status

Product ID	ABC4091EX-A
Model Code	40-SER-PDP-A-EX

Anybus Communicator – Ethernet to PROFIBUS DP Device ATEX



Identification and Status

Country of Origin	Sweden
HS Code	8517620000
Export Control Classification Number (ECCN)	5A991.b.1

Physical Features

Push Buttons	Factory reset
--------------	---------------

EtherCAT Features

EtherCAT Bandwidth	10/100 Mbit down to 100us cycle time
EtherCAT Input Data Size	1486 bytes
EtherCAT Output Data Size	1486 bytes

EtherNet/IP Features

EtherNet/IP Bandwidth	10/100MBit down to 1ms cycle time
EtherNet/IP Input Data Size	1448 bytes
EtherNet/IP Output Data Size	1448 bytes

Modbus-TCP Features

Modbus-TCP Supported Functionality	Modbus specification V1.1b3; 4 connections; Daisy chaining
Modbus-TCP Functions Supported	1, 2, 3, 4, 5, 6, 15, 16, 23, 43/14
Modbus-TCP Bandwidth	10/100 Mbit/s
Modbus-TCP Input Data Size	1500 bytes
Modbus-TCP Output Data Size	1500 bytes

PROFINET Features

PROFINET Bandwidth	10/100MBit down to 1ms cycle time
PROFINET Input Data Size	1024 bytes
PROFINET Output Data Size	1024 bytes

Certifications and Standards

Anybus Communicator – Ethernet to PROFIBUS DP Device ATEX




Certifications and Standards

ATEX Information	II 3 G Ex ec IIC T4 Gc, EN IEC 60079-0, 60079-7, IEC 60664-3
Environment	EN 55016-2-3 Class A, EN 55032 Class A, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-9
WEEE Category	IT and telecommunications equipment



Use Case

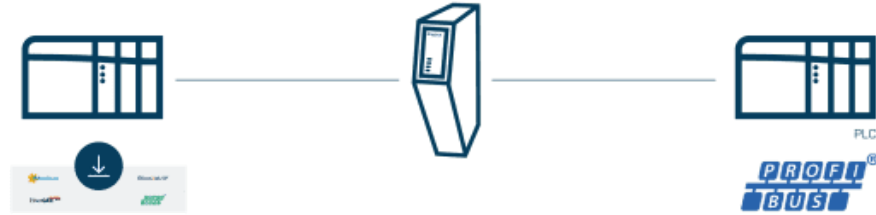

The communicator can be used wherever there is a need to transfer data between control systems using different industrial protocols.