

Anybus Communicator EtherNet/IP Scanner – Common Ethernet

Item number: ABC3390-A

The Anybus Communicator EtherNet/IP Scanner to Common Ethernet enables you to connect any device or equipment to PROFINET, EtherCAT, or Modbus TCP control systems. Anybus Communicators ensure reliable, secure, and high-speed data transfers. The intuitive user interface makes them incredibly easy to use.



A protocol converter that connects EtherNet/IP devices to Industrial Ethernet control systems

Features and benefits

- ✓ **High performance**
Powered by the award-winning NP40 network processor, it enables instant transfer of up to 1500 bytes (network dependent) between networks, totaling 3000 bytes.
- ✓ **Endian conversion**
The Communicator provides hardware-accelerated endian conversion (byte swap), saving processing time on the PLC.
- ✓ **Import EDS files**
Directly import EDS files in web user interface, eliminating the need to install third-party software.
- ✓ **Optimized hardware design**
The Communicator has forward-facing ports and is designed for IP20 and DIN-rail mounting, enabling you to install it with ease, close to connected devices, thereby reducing wiring requirements.
- ✓ **5-year warranty**
Thanks to carefully selected industrial components the Communicator operates reliably in harsh environments, ensuring uptime and longevity. Our confidence in quality is reflected in a 5-year warranty.
- ✓ **Instant data transfer**
Instant data transfer lets you take advantage of high-speed industrial networks.
- ✓ **Intuitive user interface**
Use the intuitive web-based user interface to easily configure the Communicator via the drag-and-drop functionality or to analyze live data and generate support packages.
- ✓ **Cybersecurity**
Despite advanced security, human error often causes breaches. Our Communicator's physical security switch can lock configurations and block web interface access, enhancing security.
- ✓ **Diagnostics**
The user interface displays real-time connection status and I/O data mapping for easy troubleshooting. Easily generate a support file containing all the necessary information.
- ✓ **Life cycle management**
HMS maintains every part of the Communicator, including network updates, throughout the product's lifecycle.

Anybus Communicator EtherNet/IP Scanner – Common Ethernet



General	
Net Width (mm)	27
Net Height (mm)	144
Net Depth (mm)	98
Net Weight (g)	150
Packed Width (mm)	12
Packed Height (mm)	2
Packed Depth (mm)	8
Packed Weight (g)	185
Operating Temperature °C Min	-25
Operating Temperature °C Max	70
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Current Consumption Type Value at Vcc Nom (mA)	90mA @ 24V DC (2.2W)
Current Consumption Max value at Vcc nom (mA)	125mA @24V DC (3W)
Input Voltage (V)	12-30V DC
Power Connector	3-pin, 5.08 Phoenix plug connector
Isolation	Yes
Mounting	DIN-rail (EN 50022 standard)
Housing Materials	PC ABS, UL 94 VO

Anybus Communicator EtherNet/IP Scanner – Common Ethernet



General

Packaging Material	Cardboard
--------------------	-----------

Identification and Status

Product ID	ABC3390-A
Model Code	40-ETH-ETH-B
Predecessor	AB7670-F, AB7669-F, AB7699-F
Country of Origin	Sweden
HS Code	8517620000
Export Control Classification Number (ECCN)	5A991.b.1

Physical Features

Connectors / Input / Output	2xRJ45;2x RJ45;RJ45 Config port
Push Buttons	Factory reset
DIP & Rotary Switches	Security lock switch

EtherCAT Features

EtherCAT Mode	Slave / SubDevice
EtherCAT Supported Functionality	COE (Can Over EtherCAT); PDO, SDO; APRD, ARMW, APWR, BRD, BWR, FPRD, FPRW, FPWR, FRMW, LRD, LRW, LWR
EtherCAT Configuration File	ESI available
EtherCAT Bandwidth	10/100 Mbit down to 100us cycle time
EtherCAT Input Data Size	1486 bytes
EtherCAT Output Data Size	1486 bytes

EtherNet/IP Features

EtherNet/IP Mode	Scanner / Master
EtherNet/IP Supported Functionality	EDS import; Endian conversion (byte swap); LiveList; DataExchangeControl; QoS; CT20 ODVA Conformance
EtherNet/IP No. Of Adapters	32

Anybus Communicator EtherNet/IP Scanner – Common Ethernet



EtherNet/IP Features

EtherNet/IP Configuration File	EDS available
EtherNet/IP Bandwidth	10/100MBit down to 1ms cycle time
EtherNet/IP Input Data Size	1500 bytes
EtherNet/IP Output Data Size	1500 bytes

Modbus-TCP Features

Modbus-TCP Mode	Slave / Server
Modbus-TCP Supported Functionality	Modbus specification V1.1b3; 4 connections; Daisy chaining
Modbus-TCP Functions Supported	1, 2, 3, 4, 5, 6, 15, 16, 23, 43/14
Modbus-TCP Bandwidth	10/100 Mbit/s
Modbus-TCP Input Data Size	1500 bytes
Modbus-TCP Output Data Size	1500 bytes

PROFINET Features

PROFINET Mode	Slave
PROFINET Supported Functionality	RT; Daisy chaining;
PROFINET Conformance Class	Class B
PROFINET Configuration File	GSDML available
PROFINET Bandwidth	10/100MBit down to 1ms cycle time
PROFINET Input Data Size	1024 bytes
PROFINET Output Data Size	1024 bytes

Certifications and Standards

Protection Class IP	IP20
Recycle / Disposal	Yes

Anybus Communicator EtherNet/IP Scanner – Common Ethernet




Certifications and Standards

UL Information	E214107: Ord.Loc UL 61010-1, CSA C22.2 No. 61010-1, UL 61010-2-201, CSA C22.2 No. 61010-2-201
Environment	EN 55016-2-3 Class A, EN 55032 Class A, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6





Use Case

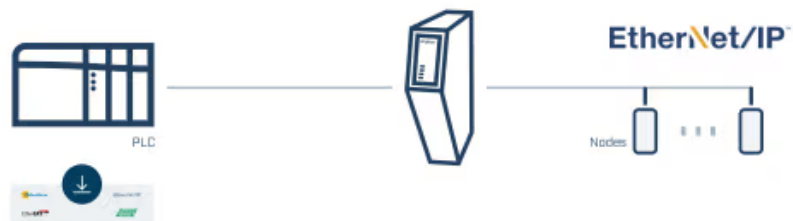

The Anybus Communicator EtherNet/IP Scanner is the easiest and most reliable way to connect EtherNet/IP devices to control systems.