




## Anybus CompactCom 30 Brick PROFINET IO 2 port

Item number: AB6382-B

The Anybus CompactCom 30 PROFINET 2-port is a communication interface that can be embedded into any industrial device or machine to enable communication with PROFINET networks. The brick version is fully embedded into the industrial device and is the best choice if you have limited space or need a specific connector or protection class.

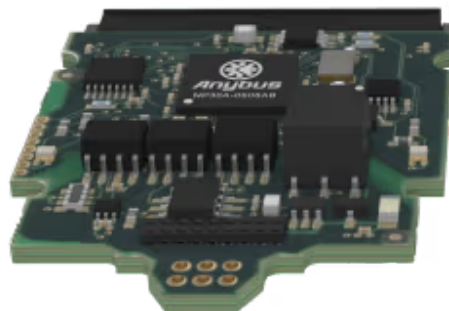

*Enable communication between industrial devices and PROFINET IO 2-Port networks*

### Features and benefits

# Anybus CompactCom 30 Brick PROFINET IO 2 port



## Identification and Status

Product ID	AB6382-B
Country of Origin	Sweden
HS Code	8517620000
Export Control Classification Number (ECCN)	3A991.a.2

## General

Net Width (mm)	50
Net Height (mm)	22
Net Depth (mm)	52
Net Weight (g)	15
Packed Weight (g)	15
Operating Temperature °C Min	-40
Operating Temperature °C Max	85
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Current Consumption Class (CompactCom series)	B
Input Voltage (V)	3.3 VDC, +/- 0.15 VDC
Application Interface	8-bit parallel (30 ns access) UART (max 625kbps)
Isolation	Galvanic Isolation
Content of Delivery	CompactCom B30 module
Mounting	PCB mounting via a customized CompactFlash connector

# Anybus CompactCom 30 Brick PROFINET IO 2 port



## General

Warranty (years)	1
------------------	---

## Physical Features

Connectors / Input / Output	M12
-----------------------------	-----

LED Indicators	Indicates Module Status and Network Status.
----------------	---

Form Factor	Brick (pluggable)
-------------	-------------------

## Certifications and Standards

Protection Class IP	IP20
---------------------	------

UL Information	E214107
----------------	---------