

Panasonic ECOi, PACi, ECOg / PAC, VRF systems to BACnet IP/MSTP Application

Item number: IN770AIR00MO000

The Panasonic application has been specially designed to allow bidirectional control and monitoring of Panasonic ECOi, PACi, ECOg / PAC, VRF systems from a BMS, SCADA, PLC, or any other device working as a BACnet/IP server or a BACnet MS/TP client. The solution allows the integration of up to 64 indoor units from a single interface.

Panasonic to BACnet/IP & MS/TP - Up to 64 Indoor Units

Features and benefits

- ✓ **BACnet/IP and BACnet MS/TP support**
The interface supports both BACnet/IP and BACnet MS/TP protocols.
- ✓ **Automatic identification**
A scan function is available for automatic identification of the units present in the VRF system.
- ✓ **Individual indoor unit energy consumption signals**
Energy consumption signals from each indoor unit are available, so they can be checked individually.
- ✓ **Commissioning-friendly approach with Intesis MAPS**
Templates can be imported and reused as often as needed, significantly reducing commissioning time.
- ✓ **Direct access to the outdoor unit**
Connection is simple, as the interface connects directly to the outdoor unit's communication bus.
- ✓ **Outdoor unit signals**
Signals assigned to the outdoor unit are available to be used in the integration.
- ✓ **Two configuration port options**
Configuration of the interface can be carried out through either its IP or USB (Console) port.
- ✓ **Configuration tool and interface automatic updates**
Both the Intesis MAPS configuration tool and the interface's firmware can receive automatic updates.

Panasonic ECOi, PACi, ECOg / PAC, VRF systems to BACnet IP/MSTP Application



Identification and Status

| | |
|---|-------------------------|
| Product ID | IN770AIR00MO000_BAC_PAN |
| Country of Origin | Spain |
| HS Code | 8517620000 |
| Export Control Classification Number (ECCN) | EAR99 |

General

| | |
|------------------------------|--|
| Net Width (mm) | 106 |
| Net Height (mm) | 58 |
| Net Depth (mm) | 90 |
| Net Weight (g) | 240 |
| Packed Width (mm) | 13 |
| Packed Height (mm) | 8.5 |
| Packed Depth (mm) | 14 |
| Packed Weight (g) | 310 |
| Operating Temperature °C Min | 0 |
| Operating Temperature °C Max | 60 |
| Input Voltage (V) | For DC: 12 .. 36 VDC \pm 10%, Max: 250 mA For AC: 24 VAC \pm 10 %, 50-60 Hz, Max: 127 mA Recommended voltage: 24 VDC, Max: 127 mA |
| Power Connector | 3-pole |
| Capacity | Up to 64 indoor units and up to 32 outdoor units. |
| Installation Conditions | This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit. |
| Content of Delivery | Intesis Gateway, Installation Manual, USB Configuration cable. |

Panasonic ECOi, PACi, ECOg / PAC, VRF systems to BACnet IP/MSTP Application



General

| | |
|-----------------------------------|---|
| Not Included (in delivery) | Power supply not included. |
| Mounting | DIN rail mount (bracket included), Wall mount |
| Housing Materials | Plastic |
| Warranty (years) | 3 years |
| Packaging Material | Cardboard |

Physical Features

| | |
|------------------------------------|--|
| Connectors / Input / Output | Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB. |
| LED Indicators | Gateway and communication status. |
| Push Buttons | Factory reset. I-Am message (for BACnet only). Normal mode/programming mode switch (for KNX only). |
| DIP & Rotary Switches | EIA-485 serial port configuration. |

Certifications and Standards


| | |
|----------------------------|-------------------------------------|
| ETIM Classification | EC001604 |
| WEEE Category | IT and telecommunications equipment |

Panasonic ECOi, PACi, ECOg / PAC, VRF systems to BACnet IP/MSTP Application



Use Case

Panasonic

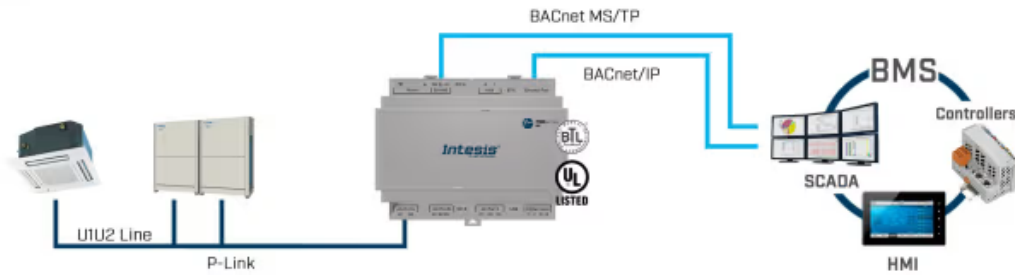

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation