



## Ixxat CAN-CR300

Item number: 1.01.0210.40000

The Ixxat CAN-CR300 repeater with four CAN/CAN FD interfaces improves the CAN bus load capacity, establishes a physical coupling of bus systems and offers galvanic isolation. It provides the flexibility to optimize network structures and liberates them from CAN bus structure constraints for optimized operation. With integrated termination resistors.

*CAN/CAN FD repeater with four channels and termination resistor*

## Features and benefits

- ✓ **Robust industrial use**  
Designed for industrial environments, meeting high demands for robustness, temperature ranges, and safety.
- ✓ **Fast and transparent operation**  
Minimal impact on real-time behavior, equivalent to a short line length (ca. 35 m/175 ns delay). Enabling transparent transmission, compatible with all higher layer protocols.
- ✓ **Enhanced network reliability**  
Higher system reliability by electrically isolating CAN/CAN FD segments and power up to 1 kV. This enhances the protection of the device against damage to electronics caused by voltage peaks.
- ✓ **Integrated bus termination resistors**  
Integrated bus termination resistors (120 Ohm, switchable via DIP switch) prevent reflections on the line ends and ensure optimum communication.
- ✓ **Flexibility in CAN FD network design**  
Helps to optimize CAN/CAN FD network structures by enabling extended layouts (stub lines, star and tree topologies).
- ✓ **Cost savings due to simple wiring**  
Optimized topologies enable simpler wiring, resulting in less cables and cost savings at installation and maintenance.
- ✓ **Network monitoring and fault recovery**  
In case of disturbances, the repeater automatically disconnects the affected segment and restores it after the fault is resolved.



## Identification and Status

Product ID	1.01.0210.40000
Country of Origin	Germany
HS Code	8517620000
Export Control Classification Number (ECCN)	EAR99

## General

Net Width (mm)	105
Net Height (mm)	114
Net Depth (mm)	22.5
Net Weight (g)	170
Packed Width (mm)	13
Packed Height (mm)	5
Packed Depth (mm)	17
Packed Weight (g)	170
Operating Temperature °C Min	-20
Operating Temperature °C Max	70
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Relative Humidity	10 to 95 %, non-condensing
Current Consumption Type Value at Vcc Nom (mA)	90
Current Consumption Max value at Vcc nom (mA)	100



## General

<b>Input Voltage (V)</b>	+9 V to +36 V DC
<b>Isolation</b>	1 kV DC for 1 sec.
<b>Content of Delivery</b>	CAN FD repeater, user manual
<b>Mounting</b>	DIN rail mount (bracket included)
<b>Housing Materials</b>	Polyamide housing for top hat rail mounting
<b>Packaging Material</b>	Cardboard
<b>Warranty (years)</b>	1

## Physical Features

<b>Connectors / Input / Output</b>	4 x screw terminals, 1 x power connector
------------------------------------	--

## CAN Features

<b>CAN Mode</b>	CAN high-speed (ISO 11898-2) with CAN choke
<b>CAN Baud Rate</b>	Up to 1 Mbit/s

## CAN FD Features

<b>CAN FD Mode</b>	ISO CAN FD, nonISO CAN FD
<b>CAN FD Transceiver</b>	MCP2562FD
<b>CAN FD Baud Rate</b>	Arbitration rate up to 1000 kBit/s, data rate up to 8000 kBit/s (verified by testing). User defined bit rates are possible.

## Certifications and Standards


<b>Protection Class IP</b>	IP20
<b>ETIM Classification</b>	EC000698
<b>WEEE Category</b>	IT and telecommunications equipment




## Use Case

**Conventional bus structure**

The distance between the two nodes furthest apart (1/9) is 220 meters.

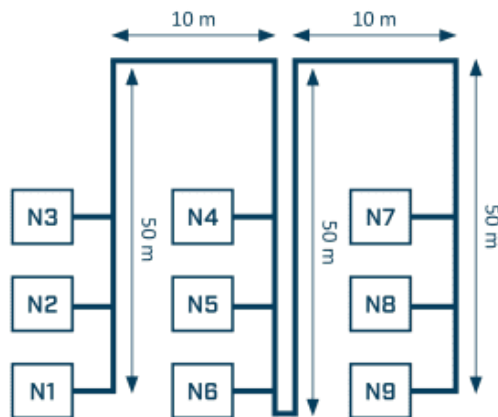**Extended structure with drop line**

The distance between the two nodes furthest apart (1/6 or 6/9) is 145 meters.

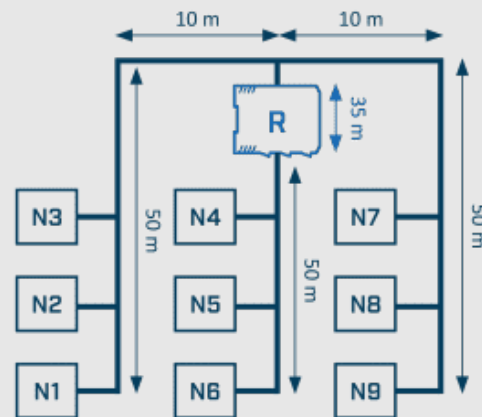

CAN repeaters can be used to better adapt the cable routing to the ambient conditions. Stub lines can be made and the bus structure can be expanded to a star/tree structure, which saves cable lengths. Shorter cable lengths reduce interference on the signal lines and enable higher bit rates. Segments connected via repeaters are galvanically decoupled and therefore offer overvoltage protection for connected participants.