

## Panasonic ECOi, PACi, ECOg / PAC, VRF systems to Home Automation Application

Item number: IN770AIRXXSO000

The Panasonic application has been specially designed to allow bidirectional control and monitoring of Panasonic ECOi, PACi, ECOg / PAC, VRF systems from a Home Automation system. The solution allows the integration of up to 4 indoor units from a single interface.



*Panasonic to Home Automation - Up to 4 Indoor Units*

### Features and benefits

- ✓ **IP Home Automation integration**  
Thanks to our open ASCII protocol integration of any IP Home Automation System is easily achievable.
- ✓ **Direct Ethernet connection**  
The interface is directly connected via Ethernet to the home's local IP network,
- ✓ **Outdoor unit signals**  
Signals assigned to the outdoor unit are available to be used in the integration.
- ✓ **Driver compatibility**  
A wide range of compatible drivers is available on the Intesis webpage.
- ✓ **Direct access to the outdoor unit**  
Connection is simple, as the interface connects directly to the outdoor unit's communication bus.
- ✓ **Automatic identification**  
A scan function is available for automatic identification of the units present in the VRF system.
- ✓ **Multiple TCP client support**  
The interface supports up to 6 TCP clients (incoming sockets).
- ✓ **Commissioning-friendly approach with Intesis MAPS**  
Templates can be imported and reused as often as needed, significantly reducing commissioning time.

# Panasonic ECOi, PACi, ECOg / PAC, VRF systems to Home Automation Application



General	
Net Weight (g)	240
Packed Width (mm)	106
Packed Height (mm)	58
Packed Depth (mm)	90
Packed Weight (g)	310
Operating Temperature °C Min	0
Operating Temperature °C Max	60
Capacity	Up to 4 indoor units and up to 16 outdoor units.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway, Installation Manual, USB Configuration cable.
Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Packaging Material	Cardboard
Warranty (years)	3 years

Identification and Status	
Product ID	IN770AIRXXSO000_WMP_PAN
Country of Origin	Spain
HS Code	8517620000
Export Control Classification Number (ECCN)	EAR99

# Panasonic ECOi, PACi, ECOg / PAC, VRF systems to Home Automation Application



## Identification and Status

<b>Purchasing Multiple ERP</b>	1
--------------------------------	---

## Physical Features

<b>LED Indicators</b>	Gateway and communication status.
<b>Push Buttons</b>	Factory reset. I-Am message (for BACnet only). Normal mode/programming mode switch (for KNX only).

## Certifications and Standards

<b>ETIM Classification</b>	EC001604
<b>WEEE Category</b>	IT and telecommunications equipment


# Panasonic ECOi, PACi, ECOg / PAC, VRF systems to Home Automation Application



## Use Case

**Panasonic**

**Home Automation**

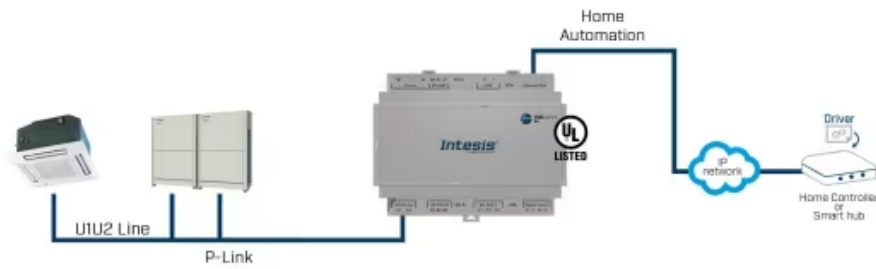

Drivers available for:

- AMX
- Control4
- CRESTRON
- eedomus
- ELAN
- FIBARO
- HEOS
- IEEEOM
- KUJU
- SAVANT
- Vera

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation