

Mitsubishi Heavy Industries VRF systems to Home Automation Application



General	
Net Weight (g)	275
Packed Width (mm)	106
Packed Height (mm)	58
Packed Depth (mm)	90
Packed Weight (g)	345
Operating Temperature °C Min	0
Operating Temperature °C Max	60
Capacity	Up to 4 indoor units and up to 12 outdoor units.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway, Installation Manual, USB Configuration cable.
Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Packaging Material	Cardboard
Warranty (years)	3 years

Identification and Status	
Product ID	IN776MHIXXSO000_WMP_MHI
Country of Origin	Spain
HS Code	8517620000
Export Control Classification Number (ECCN)	EAR99

Mitsubishi Heavy Industries VRF systems to Home Automation Application



Identification and Status

Purchasing Multiple ERP	1
--------------------------------	---

Physical Features

LED Indicators	Gateway and communication status.
Push Buttons	Factory reset. I-Am message (for BACnet only). Normal mode/programming mode switch (for KNX only).


Certifications and Standards

ETIM Classification	EC001604
WEEE Category	IT and telecommunications equipment

Mitsubishi Heavy Industries VRF systems to Home Automation Application



Use Case

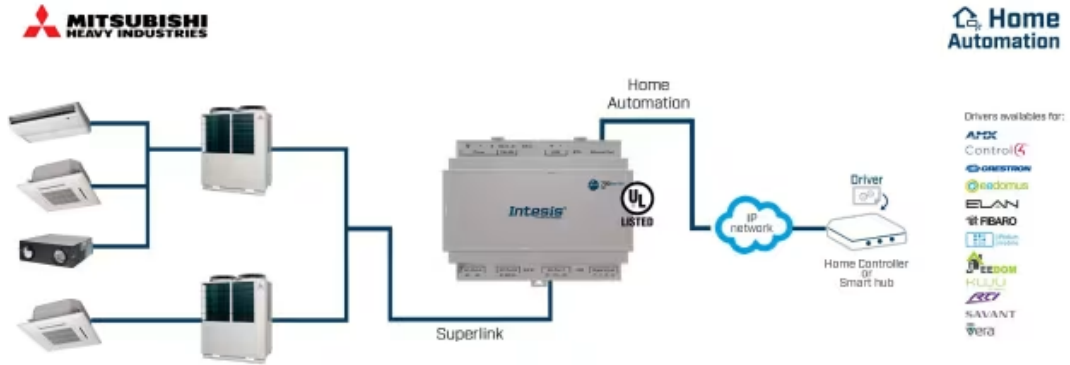

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation