

## Daikin VRV and Sky systems to KNX Interface

Item number: INKNXDAI001R000

The Daikin-KNX interface allows full bidirectional communication between Daikin VRV and Sky systems and KNX installations. It connects directly to the indoor unit and delivers complete interoperability with KNX.



*Daikin to KNX - 1 indoor unit*

### Features and benefits

- ✓ **ETS configuration**  
The interface is configured using the ETS standard configuration tool software.
- ✓ **Multiple energy efficiency functions available**  
Timeout, open window, or occupancy energy-saving functions are available to reduce energy costs.
- ✓ **Total unit control and monitoring from KNX**  
Through internal variables, running hours counter (for maintenance purposes), and error indication.
- ✓ **AC unit control by both remote controller and KNX**  
The AC unit can be simultaneously controlled by the manufacturer's remote controller and KNX.
- ✓ **Compatible with all KNX thermostats in the market**  
All the required DPT objects to be compatible with all KNX thermostats in the market are available.
- ✓ **Smooth KNX thermostat integration**  
KNX thermostats are allowed to control the AC unit via the thermostat's temperature sensor.
- ✓ **Up to five scenes saved/executed from KNX**  
Up to five scenes can be saved and executed from KNX.
- ✓ **Compact dimensions, allowing inside installation**  
The interface can be quickly installed inside the AC unit thanks to its reduced dimensions.



General	
Net Width (mm)	71
Net Height (mm)	71
Net Depth (mm)	27
Net Weight (g)	70
Packed Width (mm)	122
Packed Height (mm)	67
Packed Depth (mm)	93
Packed Weight (g)	127
Operating Temperature °C Min	-25
Operating Temperature °C Max	60
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Power Consumption (W)	0.232
Input Voltage (V)	29 VDC
Power Connector	2-pole
Configuration	ETS
Capacity	1 Indoor unit.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
AC Model Compatibility	Daikin VRV & Sky systems



## General

<b>Content of Delivery</b>	Intesis gateway and installation manual.
<b>Not Included (in delivery)</b>	Communication cables.
<b>Housing Materials</b>	Plastic
<b>Warranty (years)</b>	3 years
<b>Packaging Material</b>	Cardboard

## Identification and Status

<b>Product ID</b>	INKNXDAI001R000
<b>Country of Origin</b>	Spain
<b>HS Code</b>	8517620000
<b>Export Control Classification Number (ECCN)</b>	EAR99

## Physical Features


<b>Connectors / Input / Output</b>	KNX, HVAC port.
<b>LED Indicators</b>	KNX

## Certifications and Standards

<b>ETIM Classification</b>	EC001604
<b>WEEE Category</b>	IT and telecommunications equipment



## Use Case

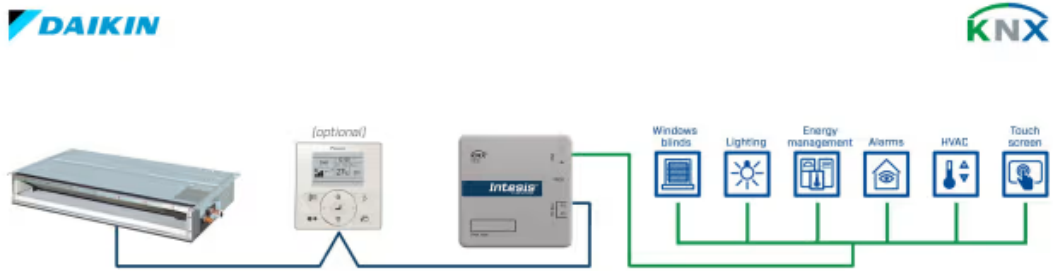

Integration example.