

## DALI-2 to BACnet/IP Server Gateway

Item number: INBACDAL0640500

Integrate any DALI/DALI-2 driver and DALI-2 light or occupancy sensor with a BACnet BMS or any BACnet/IP controller. This integration aims to make DALI devices and their data and resources accessible from a BACnet-based control system or device as if they were a part of the BACnet system and vice versa.



*DALI-2 to BACnet/IP - 1 DALI channel*

### Features and benefits

- ✓ **Support for BACnet/IP client**  
The gateway supports the BACnet/IP client protocol.
- ✓ **Easy DALI commissioning/integration w/Intesis MAPS**  
Integration and DALI commissioning processes are managed via the Intesis MAPS configuration tool.
- ✓ **Integrated DALI power supply**  
A DALI power supply is integrated into the gateway, so no external power supply is required.
- ✓ **10000 total signals max, 230 mA current guaranteed**  
Up to 10,000 signals can be defined in total, with a guaranteed output current of 230 mA.
- ✓ **Commissioning-friendly approach with Intesis MAPS**  
Templates can be imported and reused as often as needed, significantly reducing commissioning time.
- ✓ **DALI/DALI-2 drivers & DALI-2 Input devices Support**  
DALI/DALI-2 driver, DALI-2 input device support: push buttons, absolute Eingaben, occupancy/light sensors.
- ✓ **Max 64 drivers/ballasts + 64 DALI-2 input devices**  
Supports up to 64 drivers/ballasts + 64 DALI-2 input devices (sensors/push buttons/absolute inputs).
- ✓ **BACnet Advanced features - calendars, schedules...**  
BACnet's advanced features, such as calendars, trend logs, schedules, and more, are available.

# DALI-2 to BACnet/IP Server Gateway



General	
Net Width (mm)	106
Net Height (mm)	56
Net Depth (mm)	88
Net Weight (g)	167
Packed Width (mm)	127
Packed Height (mm)	86
Packed Depth (mm)	140
Packed Weight (g)	269
Operating Temperature °C Min	0
Operating Temperature °C Max	60
Input Voltage (V)	9 to 36VDC +/-10%, Max.: 140mA.
Power Connector	3-pole
Capacity	1 DALI channel: Up to 64 drivers/ballasts and 64 DALI-2 input devices (sensors, push buttons or absolute inputs). Up to 10000 signals in total.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway, Installation Manual, USB Configuration cable.
Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Warranty (years)	3 years



## General

<b>Packaging Material</b>	Cardboard
---------------------------	-----------

## Identification and Status

<b>Product ID</b>	INBACDAL0640500
-------------------	-----------------

<b>Country of Origin</b>	Spain
--------------------------	-------

<b>HS Code</b>	8517620000
----------------	------------

<b>Export Control Classification Number (ECCN)</b>	EAR99
--	-------

## Physical Features

<b>Connectors / Input / Output</b>	Power supply, DALI, Ethernet.
------------------------------------	-------------------------------


## Certifications and Standards

<b>ETIM Classification</b>	EC001604
----------------------------	----------

<b>WEEE Category</b>	IT and telecommunications equipment
----------------------	-------------------------------------



## Use Case

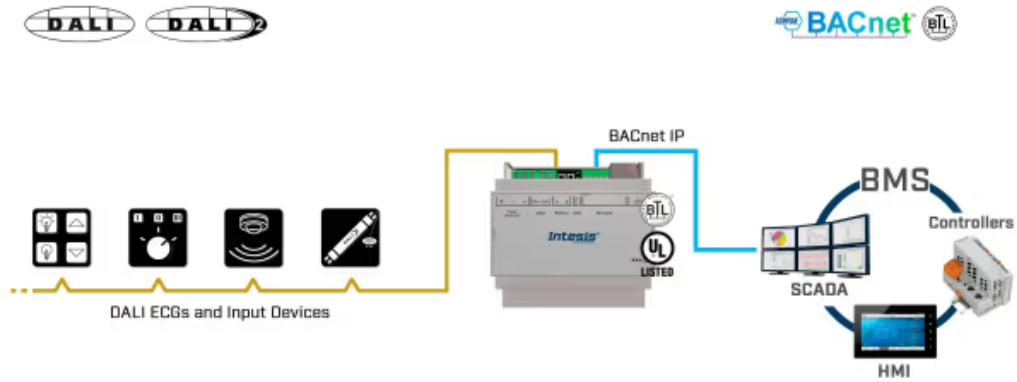

Integration of DALI drivers and sensors into a BACnet installation.