



Hisense VRF systems to Modbus TCP/RTU

Item number: INMBSHIS064O000

This Hisense application was designed to allow bidirectional control and monitoring of Hisense VRF systems from a BMS, SCADA, PLC, or any other device working as a Modbus client. The solution allowed the integration of up to 64 indoor units from a single interface. Please refer to the new product reference for further details.

Replaced by: IN770AIR00MO000



Features and benefits



General

| | |
|--------------------|---------|
| Net Width (mm) | 88 |
| Net Height (mm) | 56 |
| Net Depth (mm) | 90 |
| Net Weight (g) | 220 |
| Packed Width (mm) | 14 |
| Packed Height (mm) | 8 |
| Packed Depth (mm) | 12 |
| Packed Weight (g) | 290 |
| Warranty (years) | 3 years |

Identification and Status

| | |
|---|-------------------------|
| Product ID | INMBSHIS0640000 |
| Successor | IN770AIR00MO000_MBS_HIS |
| Country of Origin | Spain |
| HS Code | 8517620000 |
| Dual Usage | No |
| Export Control Classification Number (ECCN) | EAR99 |

Physical Features

| | |
|------------------|-----|
| Contains Battery | Yes |
|------------------|-----|

Certifications and Standards


| | |
|---------------------|----------|
| ETIM Classification | EC001604 |
|---------------------|----------|



Use Case

Hisense

Modbus

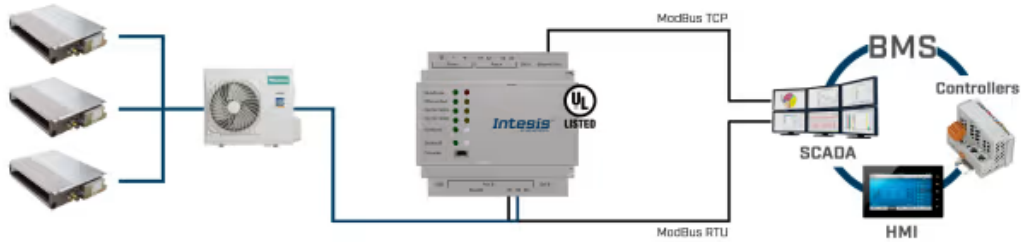

Integration example.