

DALI-2 to BACnet/IP Server Gateway

Item number: INBACDAL0640500

Integrate any DALI/DALI-2 driver and DALI-2 light or occupancy sensor with a BACnet BMS or any BACnet/IP controller. This integration aims to make DALI devices and their data and resources accessible from a BACnet-based control system or device as if they were a part of the BACnet system and vice versa.



DALI-2 to BACnet/IP - 1 DALI channel

Features and benefits

- ✓ **Support for BACnet/IP client**
The gateway supports the BACnet/IP client protocol.
- ✓ **Easy DALI commissioning/integration w/Intesis MAPS**
Integration and DALI commissioning processes are managed via the Intesis MAPS configuration tool.
- ✓ **Integrated DALI power supply**
A DALI power supply is integrated into the gateway, so no external power supply is required.
- ✓ **10000 total signals max, 230 mA current guaranteed**
Up to 10,000 signals can be defined in total, with a guaranteed output current of 230 mA.
- ✓ **Commissioning-friendly approach with Intesis MAPS**
Templates can be imported and reused as often as needed, significantly reducing commissioning time.
- ✓ **DALI/DALI-2 drivers & DALI-2 Input devices Support**
DALI/DALI-2 driver, DALI-2 input device support: push buttons, absolute Eingaben, occupancy/light sensors.
- ✓ **Max 64 drivers/ballasts + 64 DALI-2 input devices**
Supports up to 64 drivers/ballasts + 64 DALI-2 input devices (sensors/push buttons/absolute inputs).
- ✓ **BACnet Advanced features - calendars, schedules...**
BACnet's advanced features, such as calendars, trend logs, schedules, and more, are available.



General

Net Width (mm)	115
Net Height (mm)	130
Net Depth (mm)	100
Net Weight (g)	167
Packed Width (mm)	127
Packed Height (mm)	86
Packed Depth (mm)	140
Packed Weight (g)	269
Operating Temperature °C Min	0
Operating Temperature °C Max	60
Storage Temperature °C Min	-30
Storage Temperature °C Max	60
Power Consumption (W)	5
Input Voltage (V)	9 to 36VDC +/-10%, Max.: 140mA.
Power Connector	3-pole
Configuration	Intesis MAPS
Capacity	1 DALI channel: Up to 64 drivers/ballasts and 64 DALI-2 input devices (sensors, push buttons or absolute inputs). Up to 10000 signals in total.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway, Installation Manual, USB Configuration cable.

DALI-2 to BACnet/IP Server Gateway



General

Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Warranty (years)	3 years
Packaging Material	Cardboard

Identification and Status

Product ID	INBACDAL0640500
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	EAR99

Physical Features

Connectors / Input / Output	Power supply, DALI, Ethernet.
LED Indicators	Gateway and communication status.
Contains Battery	No

Certifications and Standards

ETIM Classification	EC001604
CE	Yes
CB	Yes
UL	Yes
BTL	Yes
DALI-2	Yes




Certifications and Standards

WEEE Category	IT and telecommunications equipment
---------------	-------------------------------------



Use Case

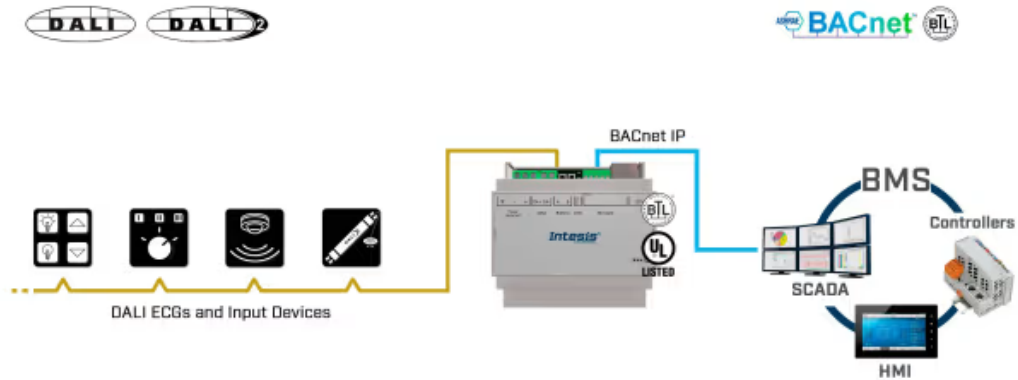

Integration of DALI drivers and sensors into a BACnet installation.