

## Mitsubishi Electric Domestic, Mr.Slim and City Multi to BACnet MS/TP Interface

Item number: IN485MIT001I000

The Mitsubishi Electric-BACnet interface allows full bidirectional communication between Mitsubishi Electric domestic, Mr. Slim, and City Multi air conditioner units and BACnet MS/TP networks. The interface enables BACnet communication via polling or subscription requests (COV), making the indoor unit available through independent BACnet objects.



*Mitsubishi Electric Domestic to BACnet MS/TP - 1 indoor unit*

### Features and benefits

- ✓ **BACnet MS/TP support only**  
Only the BACnet MS/TP protocol is supported.
- ✓ **AC unit data served as fixed BACnet Objects**  
Air conditioning unit properties and functionalities are abstracted into fixed BACnet Objects.
- ✓ **Total unit control and monitoring from BACnet**  
Through internal variables, running hours counter (for maintenance purposes), and error indication.
- ✓ **AC unit control by remote and BACnet MS/TP**  
The AC unit can simultaneously be controlled via BACnet MS/TP and its own remote controller.
- ✓ **Configuration from onboard DIP switches**  
The interface configuration is carried out directly through its onboard DIP switches.
- ✓ **Occupancy function to allow energy savings**  
Occupancy function that helps reduce costs, as HVAC systems are one of the main energy consumers.
- ✓ **Supports silent mode**  
The interface supports silent mode, allowing for the AC unit's quiet operation.
- ✓ **No external power required**  
The interface is powered directly from the AC unit, so no external power supply is required.

# Mitsubishi Electric Domestic, Mr.Slim and City Multi to BACnet MS/TP Interface



General	
Net Width (mm)	53
Net Height (mm)	58
Net Depth (mm)	93
Net Weight (g)	78
Packed Width (mm)	140
Packed Height (mm)	86
Packed Depth (mm)	110
Packed Weight (g)	216
Operating Temperature °C Min	0
Operating Temperature °C Max	70
Storage Temperature °C Min	0
Storage Temperature °C Max	70
Power Consumption (W)	1.02
Input Voltage (V)	12 VDC
Power Connector	Other
Configuration	Dip-switches
Capacity	1 Indoor unit.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
AC Model Compatibility	Mitsubishi Electric Air Conditioning

# Mitsubishi Electric Domestic, Mr.Slim and City Multi to BACnet MS/TP Interface



## General

Content of Delivery	Intesis Gateway, Installation Manual, AC Connection cable.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Warranty (years)	3 years
Packaging Material	Cardboard

## Identification and Status

Product ID	IN485MIT001I000
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	EAR99

## Physical Features

Connectors / Input / Output	EIA-485, HVAC port.
LED Indicators	Gateway and communication status.
DIP & Rotary Switches	EIA-485 serial port configuration. Gateway settings.
Contains Battery	No

## Certifications and Standards

ETIM Classification	EC001604
CE	Yes
CB	Yes
UKPSTI	Yes
UL	Yes

# Mitsubishi Electric Domestic, Mr.Slim and City Multi to BACnet MS/TP Interface




## Certifications and Standards

BTL	Yes
WEEE Category	IT and telecommunications equipment

# Mitsubishi Electric Domestic, Mr.Slim and City Multi to BACnet MS/TP Interface



## Use Case

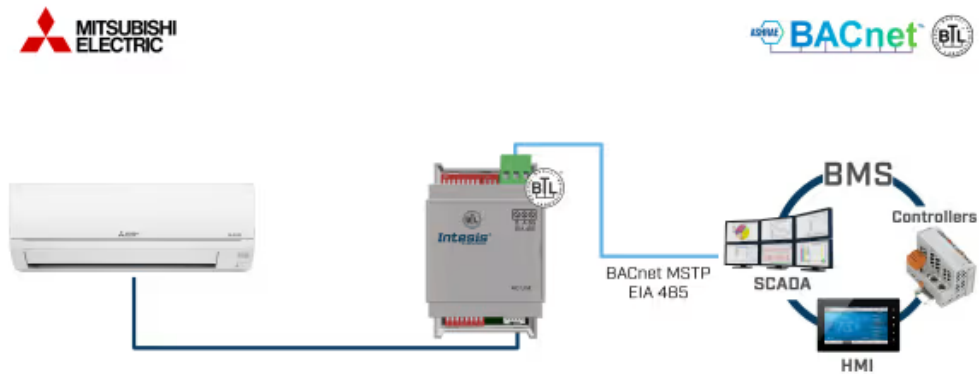

Integration example.