




Ewon Flexy 205 - White label

Item number: FLEXY20593_00MA

The Ewon Flexy is a multipurpose IIoT data gateway that allows machine builders and users to monitor and collect vital KPIs for analysis and predictive maintenance. Gather data from PLCs, sensors and other devices thanks to the support of a wide range of industrial protocols, including OPC UA.

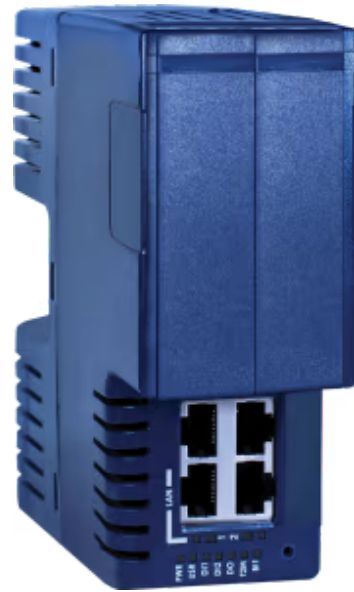

Industrial VPN gateway for IIoT data collection & monitoring

Features and benefits

- ✓ **Easily acquire and log data**
Gather data from PLCs, sensors and other devices thanks to the support of a wide range of industrial protocols, including OPC UA.
- ✓ **Implement efficient data monitoring**
The Ewon Flexy supports all major PLC protocols for data logging & alarms. Local web-dashboard for KPIs monitoring through Talk2m's M2web service. OPC UA server to share data with Enterprise Systems.
- ✓ **Do more with built-in connectors and APIs**
You might not have a data application today. But when the time comes, be confident in the fact that you can connect to a local or cloud data solution and make your machine smarter.
- ✓ **Extended data services**
Wide range of possibilities: PLC data acquisition, alarms, OPC UA, Modbus, MQTT, SNMP, HTTPs, local web-dashboards, cloud live KPIs, and programming (Basic & Java).
- ✓ **Enable machine remote connectivity**
Enjoy VPN remote access for PLC troubleshooting. The included Talk2m cloud's global infrastructure is redundant and reliable. Setup your device in minutes for unrivalled connectivity success.
- ✓ **Leverage flexible data integration**
Full flexibility to send data to any server. Multiple IoT connectors, and MQTT/HTTPS through embedded Basic or Java scripting engine. Talk2m Data Services with APIs for third party software integration.
- ✓ **Future-proof thanks to extension cards**
Discover the interchangeable extension cards of the Ewon Flexy: WiFi, 3G, 4G, USB, Ethernet WAN. These allow you to easily keep up with the evolution of communication technologies.
- ✓ **OPC UA ready**
Ewon Flexy gateways support OPC UA, a modern protocol for industrial automation. It enables easy machine connectivity, asset modernization, and secure data collection from the factory floor.



Ewon Flexy 205 - White label

Data Features

Router Features	Routing capability between LAN and WAN Ethernet interface and Ethernet to serial gateway. Routing capability between LAN and WAN Ethernet interface and Ethernet to serial gateway. Routing capability between LAN and WAN Ethernet interface and Ethernet to serial gateway. IP filtering, IP forwarding, NAT, Port forwarding, Proxy, Routing table, DHCP client/server, NAT 1 :1.
VPN	OpenVPN either in SSL UDP or TCP.
VPN Security	VPN sessions are end-to-end encrypted using SSL/TLS protocol. Communications between the remote user and the Ewon are fully encrypted using the SSL/TLS protocol, thereby ensuring data authenticity, integrity & confidentiality. Indeed, all users and Ewon units are authenticated using x509 SSL certificates and end-to-end traffic is encrypted using strong symmetric & asymmetric algorithms that are part of the SSL/TLS protocol cipher suite.
Data Acquisition Protocols	OPC UA, Modbus RTU, Modbus-TCP, Unitelway, DF1, PPI, MPI, PROFIBUS, FINS Hostlink, FINS TCP, EtherNet/IP, ISO TCP, Mitsubishi FX, Mitsubishi MELSEC, Hitachi EH, ASCII, BACnet/IP
Data Publishing Protocols	OPC UA, Modbus, MQTT, SNMP, HTTPS
Data Logging	Define up to 2500 internal tags. Internal database for data logging (real-time logging and historical logging up to 1,000,000 timestamps). Historical data can be exported to DataMailbox or transferred by FTP or email.

General

Net Width (mm)	55
Net Height (mm)	133
Net Depth (mm)	122
Net Weight (g)	122
Packed Width (mm)	295
Packed Height (mm)	180
Packed Depth (mm)	57
Packed Weight (g)	184
Operating Temperature °C Min	-25
Operating Temperature °C Max	+60
Storage Temperature °C Min	-30
Storage Temperature °C Max	+70
Relative Humidity	10 to 95% relative humidity (non-condensing).



Ewon Flexy 205 - White label

General

Input Voltage (V)	12-24VDC+/-20%, LPS。消费：取决于安装的扩展卡（请参阅我们网站上的安装指南）。
Power Connector	9-pole
Configuration	Web-Based configuration: Embedded web interface with setup wizards for configuration and maintenance (no extra software needed). Authentication with login/password and user management capability. Possibility of uploading custom web GUI.
Content of Delivery	This product consists of the following components: an industrial gateway in a plastic housing, a power connector, 2 pcs of Flexy blank extension front plates, a start-up guide document in paper version, legal references in paper version and a cardboard box.
Not Included (in delivery)	Any variant of extension boards and their accessories (antenna, cable)
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Packaging Material	Cardboard
Warranty (years)	3
PLC Compatibility	Rockwell Automation/Allen Bradley, Siemens, Schneider Electric, Mitsubishi Electric, Vipa, Omron, Hitachi

Identification and Status

Product ID	FLEXY20593_00MA
Model Code	02801
Country of Origin	Belgium
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	5A992.c

Physical Features

Connectors / Input / Output	4 x RJ45 Ethernet port: 10/100 Mb. Configurable LAN/WAN ports, port 1 always LAN, 2x Digital input: 0 to 12/24VDC; 1.5kV isolation, 1x Digital output: open drain (MOSFET) 200mA; 1.5 kV isolation.
Contains Battery	No

Certifications and Standards



Ewon Flexy 205 - White label

Certifications and Standards

FCC	Yes
IC	Yes
UKCA	Yes
UL	Yes
KC	Yes
RCM	No
PTCRB	No
Environment	Temperature - Operating & Storage tested according to: IEC 60068-2-1 Cold test, IEC 60068-2-2 Dry heat test, IEC 60068-2-14 Change of temperature, IEC 60068-2-30 Cyclic damp heat test
Vibration and Shock	Vibration & shocks tested according to: IEC 60068-2-27 Bumps, IEC 60068-2-64 Vibration (broad-band random), IEC 60068-2-6 Vibration (sinusoidal)
Waste Certification (WEEE)	Yes
WEEE Category	IT and telecommunications equipment
Other Certification	Giteki Japan, Russia FSS notification