

Anybus Communicator – EtherNet/IP adapter to PROFIBUS DP Device

Item number: ABC4014-A

The Anybus Communicator EtherNet/IP adapter to PROFIBUS DP Device enables you to connect any EtherNet/IP control system to any PROFIBUS control system. Anybus Communicators ensure reliable, secure, high-speed data transfers between different industrial networks. Thanks to our intuitive web-based user interface, they're also incredibly easy to use.



*A protocol converter that connects EtherNet/IP and
PROFIBUS DP control systems*

Features and benefits

- ✓ **Intuitive user interface**
Use the intuitive web-based user interface to easily configure the Communicator via the drag-and-drop functionality or to analyze live data, export log files, and generate support packages.
- ✓ **High performance**
Powered by the award-winning NP40 network processor and high-end components, the Communicator meets the constantly growing demand for more data to be transferred faster.
- ✓ **Instant data transfer**
Instant data transfer lets you take advantage of high-speed industrial networks, as the Communicator provides hardware-accelerated endian conversion (byte swap), saving processing time on the PLC.
- ✓ **Ensures uptime**
Thanks to carefully selected industrial components the Communicator operates reliably in harsh industrial environments ensuring uptime and a long life.
- ✓ **Brand Labeling**
Pre-configure the Communicator and customize the hardware and user interface with your colors and logos.
- ✓ **Cybersecurity**
The secure boot protects against malware, while a security switch locks configurations to prevent unauthorized changes. Ports used in production are disabled to add another layer of security.
- ✓ **Optimized hardware design**
The Communicator has forward-facing ports and is designed for IP20 and DIN-rail mounting, enabling you to install it with ease, close to connected devices, thereby reducing wiring requirements.
- ✓ **5-year warranty**
The Communicator is made to be durable and have a long life. We're so confident in its quality that we provide a 5-year warranty.
- ✓ **Instant diagnostics**
The user interface displays real-time connection status and I/O data mapping for easy troubleshooting. Easily generate a support file containing all the necessary information.
- ✓ **Life cycle management**
HMS maintains every part of the Communicator, including network updates, throughout the product's lifecycle.

Anybus Communicator – EtherNet/IP adapter to PROFIBUS DP Device



General	
Net Width (mm)	27
Net Height (mm)	144
Net Depth (mm)	98
Net Weight (g)	150
Packed Width (mm)	35
Packed Height (mm)	170
Packed Depth (mm)	115
Packed Weight (g)	185
Operating Temperature °C Min	-25
Operating Temperature °C Max	70
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Current Consumption Type Value at Vcc Nom (mA)	90mA @ 24V DC (2.2W)
Current Consumption Max value at Vcc nom (mA)	125mA @24V DC (3W)
Input Voltage (V)	12-30V DC
Power Connector	3-pin, 5.08 Phoenix plug connector
Reverse Polarity Protection	Yes
Short Circuit Protection	Yes
Isolation	TRUE

Anybus Communicator – EtherNet/IP adapter to PROFIBUS DP Device



General

Mounting	DIN-rail (EN 50022 standard)
Housing Materials	PC ABS, UL 94 VO
Packaging Material	Cardboard
Warranty (years)	5

Identification and Status

Product ID	ABC4014-A
Model Code	40-ETH-PDP-A
Predecessor	AB7832-F
Country of Origin	Sweden
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	5A991.b.1

Physical Features

Connectors / Input / Output	2xRJ45, 1x D-sub 9-pin female PROFIBUS connector, RJ45 Config port
Push Buttons	Factory reset
DIP & Rotary Switches	Security lock switch
Contains Battery	No

EtherNet/IP Features

EtherNet/IP Mode	Adapter / Slave
EtherNet/IP Supported Functionality	Endian conversion (byte swap); QoS; Ethernet/IP Class 1 and 3; Quick Connect Class B; DLR (beacon mode); Daisy Chainging; CT19 ODVA Conformance
EtherNet/IP Configuration File	EDS available
EtherNet/IP Bandwidth	10/100MBit down to 1ms cycle time

Anybus Communicator – EtherNet/IP adapter to PROFIBUS DP Device



EtherNet/IP Features

EtherNet/IP Input Data Size	1448 bytes
EtherNet/IP Output Data Size	1448 bytes

PROFIBUS Features

PROFIBUS Mode	DP Device
PROFIBUS Supported Functionality	PROFIBUS-DP Slave functionality according to extensions of EN 50170
PROFIBUS Device Address	0-125
PROFIBUS Configuration File	GSD available
PROFIBUS Baud Rate	9600 bit/s - 12 Mbit/s
PROFIBUS Input Data Size	244 bytes
PROFIBUS Output Data Size	244 bytes

Certifications and Standards

Protection Class IP	IP20
RoHS Compliant	Yes
Recycle / Disposal	TRUE
CE	Yes
FCC	No
UL	Yes
UL Information	E214107: Ord.Loc UL 61010-1, CSA C22.2 No. 61010-1, UL 61010-2-201, CSA C22.2 No. 61010-2-201
ATEX	No
KC	Yes
EMC	Yes

Anybus Communicator – EtherNet/IP adapter to PROFIBUS DP Device




Certifications and Standards	
Environment	EN 55016-2-3 Class A, EN 55032 Class A, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6
Waste Certification (WEEE)	Yes
WEEE Category	IT and telecommunications equipment

Anybus Communicator – EtherNet/IP adapter to PROFIBUS DP Device



Use Case

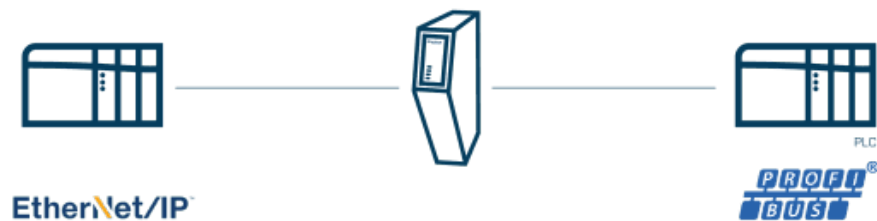

The communicator can be used wherever there is a need to transfer data between control systems using different industrial protocols.