

Panasonic ECOi, PACi, ECOg / PAC, VRF systems to KNX Application - Larger capacity

Item number: IN771AIR00LO000

The Panasonic application has been specially designed to allow bidirectional control and monitoring of Panasonic ECOi, PACi, ECOg / PAC, VRF systems from a KNX installation. The solution allows the integration of up to 128 indoor units from a single interface.



Panasonic to KNX - Up to 128 Indoor Units

Features and benefits

- ✓ **KNX standard datapoints (DPTs) support**
KNX standard datapoints (DPTs) are supported, guaranteeing a simple KNX device/system integration.
- ✓ **Automatic identification**
A scan function is available for automatic identification of the units present in the VRF system.
- ✓ **Individual indoor unit energy consumption signals**
Energy consumption signals from each indoor unit are available, so they can be checked individually.
- ✓ **Commissioning-friendly approach with Intesis MAPS**
Templates can be imported and reused as often as needed, significantly reducing commissioning time.
- ✓ **Direct access to the outdoor unit**
Connection is simple, as the interface connects directly to the outdoor unit's communication bus.
- ✓ **Outdoor unit signals**
Signals assigned to the outdoor unit are available to be used in the integration.
- ✓ **Datapoint support**
A wide range of monitoring and control datapoints is available.
- ✓ **Configuration tool and interface automatic updates**
Both the Intesis MAPS configuration tool and the interface's firmware can receive automatic updates.

Panasonic ECOi, PACi, ECOg / PAC, VRF systems to KNX Application - Larger capacity



| General | |
|------------------------------|--|
| Net Width (mm) | 106 |
| Net Height (mm) | 58 |
| Net Depth (mm) | 90 |
| Net Weight (g) | 375 |
| Packed Width (mm) | 130 |
| Packed Height (mm) | 85 |
| Packed Depth (mm) | 140 |
| Packed Weight (g) | 750 |
| Operating Temperature °C Min | -10 |
| Operating Temperature °C Max | 60 |
| Storage Temperature °C Min | -30 |
| Storage Temperature °C Max | 60 |
| Power Consumption (W) | 127 |
| Input Voltage (V) | For DC: 12 .. 36 VDC $\pm 10\%$, Max: 250 mA For AC: 24 VAC $\pm 10\%$, 50-60 Hz, Max: 127 mA Recommended voltage: 24 VDC, Max: 127 mA |
| Power Connector | 3-pole |
| Configuration | Intesis MAPS |
| Capacity | Up to 128 indoor units and up to 60 outdoor units. |
| Installation Conditions | This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit. |
| Content of Delivery | Intesis Gateway and Installation Manual. |

Panasonic ECOi, PACi, ECOg / PAC, VRF systems to KNX Application - Larger capacity



General

| | |
|----------------------------|---|
| Not Included (in delivery) | Power supply not included. |
| Mounting | DIN rail mount (bracket included), Wall mount |
| Housing Materials | Plastic |
| Warranty (years) | 3 years |
| Packaging Material | Cardboard |

Identification and Status

| | |
|---|-------------------------|
| Product ID | IN771AIR00LO000_KNX_PAN |
| Country of Origin | Spain |
| HS Code | 8517620000 |
| Dual Usage | No |
| Export Control Classification Number (ECCN) | EAR99 |

Physical Features

| | |
|-----------------------------|--|
| Connectors / Input / Output | Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB. |
| LED Indicators | Gateway and communication status. |
| Push Buttons | Factory reset. I-Am message (for BACnet only). Normal mode/programming mode switch (for KNX only). |
| DIP & Rotary Switches | EIA-485 serial port configuration. |
| Contains Battery | No |
| Battery Description | Manganese Dioxide Lithium button battery. |

Certifications and Standards

| | |
|---------------------|----------|
| ETIM Classification | EC001604 |
| CE | Yes |
| CB | Yes |

Panasonic ECOi, PACi, ECOg / PAC, VRF systems to KNX Application - Larger capacity



Certifications and Standards

| | |
|---------------|-------------------------------------|
| UKCA | Yes |
| UKPSTI | Yes |
| UL | Yes |
| WEEE Category | IT and telecommunications equipment |


Panasonic ECOi, PACi, ECOg / PAC, VRF systems to KNX Application - Larger capacity



Use Case

Panasonic

KNX

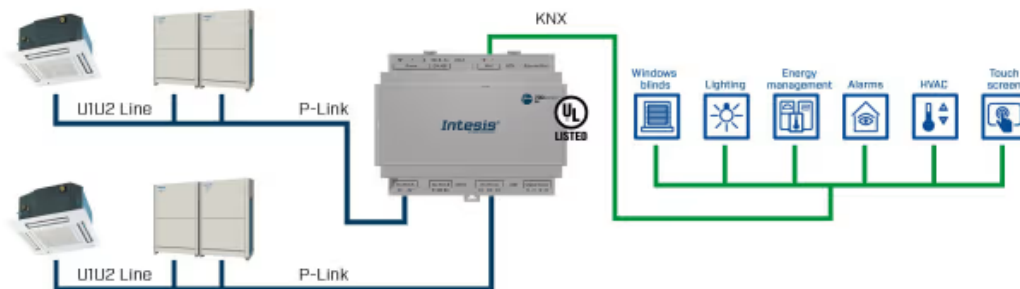

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation