

Anybus Communicator EtherNet/IP Scanner - PROFIBUS DP Device

Item number: ABC3300-A

The Anybus Communicator EtherNet/IP Scanner to PROFIBUS enables you to connect EtherNet/IP devices to PROFIBUS control systems. Anybus Communicators ensure reliable, secure, and high-speed data transfer between different industrial networks. Thanks to our intuitive web-based user interface, they're also incredibly easy to use.



A protocol converter that connects EtherNet/IP devices to PROFIBUS control systems

Features and benefits

- ✓ **High performance**
Powered by the award-winning NP40 network processor, it enables instant transfer of up to 1500 bytes (network dependent) between networks, totaling 3000 bytes.
- ✓ **Endian conversion**
The Communicator provides hardware-accelerated endian conversion (byte swap), saving processing time on the PLC.
- ✓ **Import EDS files**
Directly import EDS files in web user interface, eliminating the need to install third-party software.
- ✓ **Optimized hardware design**
The Communicator has forward-facing ports and is designed for IP20 and DIN-rail mounting, enabling you to install it with ease, close to connected devices, thereby reducing wiring requirements.
- ✓ **5-year warranty**
Thanks to carefully selected industrial components the Communicator operates reliably in harsh environments, ensuring uptime and longevity. Our confidence in quality is reflected in a 5-year warranty.
- ✓ **Instant data transfer**
Instant data transfer lets you take advantage of high-speed industrial networks.
- ✓ **Intuitive user interface**
Use the intuitive web-based user interface to easily configure the Communicator via the drag-and-drop functionality or to analyze live data and generate support packages.
- ✓ **Cybersecurity**
Despite advanced security, human error often causes breaches. Our Communicator's physical security switch can lock configurations and block web interface access, enhancing security.
- ✓ **Diagnostics**
The user interface displays real-time connection status and I/O data mapping for easy troubleshooting. Easily generate a support file containing all the necessary information.
- ✓ **Life cycle management**
HMS maintains every part of the Communicator, including network updates, throughout the product's lifecycle.

Anybus Communicator EtherNet/IP Scanner - PROFIBUS DP Device



General	
Net Width (mm)	27
Net Height (mm)	144
Net Depth (mm)	98
Net Weight (g)	150
Packed Width (mm)	35
Packed Height (mm)	170
Packed Depth (mm)	115
Packed Weight (g)	185
Operating Temperature °C Min	-25
Operating Temperature °C Max	70
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Current Consumption Type Value at Vcc Nom (mA)	90mA @ 24V DC (2.2W)
Current Consumption Max value at Vcc nom (mA)	125mA @24V DC (3W)
Input Voltage (V)	12-30V DC
Power Connector	3-pin, 5.08 Phoenix plug connector
Reverse Polarity Protection	Yes
Short Circuit Protection	Yes
Isolation	Yes

Anybus Communicator EtherNet/IP Scanner - PROFIBUS DP Device



General

Mounting	DIN-rail (EN 50022 standard)
Housing Materials	PC ABS, UL 94 VO
Packaging Material	Cardboard

Identification and Status

Product ID	ABC3300-A
Model Code	40-ETH-PDP-A
Predecessor	AB7671-F
Country of Origin	Sweden
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	5A991.b.1

Physical Features

Connectors / Input / Output	2xRJ45;1x D-sub 9-pin female PROFIBUS connector;RJ45 Config port
Push Buttons	Factory reset
DIP & Rotary Switches	Security lock switch
Contains Battery	No

EtherNet/IP Features

EtherNet/IP Mode	Scanner / Master
EtherNet/IP Supported Functionality	EDS import; Endian conversion (byte swap); LiveList; DataExchangeControl; QoS; CT20 ODVA Conformance
EtherNet/IP No. Of Adapters	32
EtherNet/IP Configuration File	EDS available
EtherNet/IP Bandwidth	10/100MBit down to 1ms cycle time

Anybus Communicator EtherNet/IP Scanner - PROFIBUS DP Device



EtherNet/IP Features

EtherNet/IP Input Data Size	1500 bytes
EtherNet/IP Output Data Size	1500 bytes

PROFIBUS Features

PROFIBUS Mode	DP Device
PROFIBUS Supported Functionality	PROFIBUS-DP Slave functionality according to extensions of EN 50170
PROFIBUS Device Address	0-125
PROFIBUS Configuration File	GSD available
PROFIBUS Baud Rate	9600 bit/s - 12 Mbit/s
PROFIBUS Input Data Size	244 bytes
PROFIBUS Output Data Size	244 bytes

Certifications and Standards

Protection Class IP	IP20
RoHS Compliant	Yes
Recycle / Disposal	Yes
CE	Yes
FCC	No
UL	Yes
UL Information	E214107: Ord.Loc UL 61010-1, CSA C22.2 No. 61010-1, UL 61010-2-201, CSA C22.2 No. 61010-2-201
KC	Yes
EMC	Yes
Environment	EN 55016-2-3 Class A, EN 55032 Class A, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6

Anybus Communicator EtherNet/IP Scanner - PROFIBUS DP Device




Certifications and Standards

Waste Certification (WEEE)	Yes
----------------------------	-----



Use Case

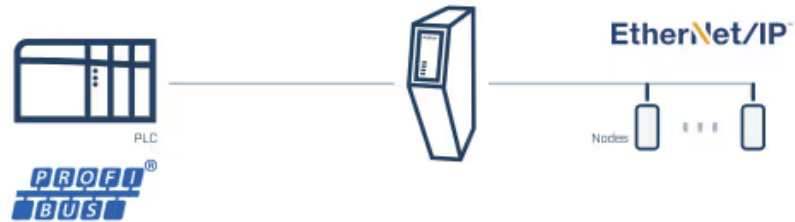

The Anybus Communicator EtherNet/IP Scanner is the easiest and most reliable way to connect EtherNet/IP devices to control systems.