

## Bosch Commercial & VRF systems to Modbus TCP/RTU Application

Item number: IN770AIRXXSO000

The Bosch application has been specially designed to allow bidirectional control and monitoring of Bosch Air Flux and Mini-VRF systems from a BMS, SCADA, PLC, or any other device working as a Modbus client. The solution allows the integration of up to 4 indoor units from a single interface.



*Bosch to Modbus TCP/RTU - Up to 4 Indoor Units*

### Features and benefits

- ✓ **Simultaneous Modbus TCP and RTU management**  
The gateway is a Modbus server and can manage both Modbus TCP and Modbus RTU simultaneously.
- ✓ **Reduce commissioning time**  
Scan the bus and find all the units connected to the VRF system with their control signals, including outdoor unit indicators.
- ✓ **A gateway for any project's size**  
Choose the license that better fits your needs (XXS - 4 indoor units, S - 16 indoor units, M - 64 indoor units), or upgrade your current license. Your project's dimensions and your budget are covered.
- ✓ **Fast and intuitive project configuration**  
Intesis MAPS is the user-friendly, in-house-developed configuration tool that enables you to maximize the potential of Intesis gateways. Simply select your template and eliminate the need for tedious manual signal mapping.
- ✓ **Minimize the use of installation materials, reduce the installation work**  
The gateway is connected directly to the outdoor units' communication bus. One single gateway enables centralized access to the entire HVAC system.
- ✓ **Enable energy efficiency by controlling the building's main consuming asset**  
The gateway's Power Estimation Algorithm allows you to estimate the energy consumption of each indoor unit present in the VRF system.
- ✓ **Avoid compatibility issues**  
This gateway is compatible with Bosch Air Flux and Mini-VRF systems.
- ✓ **Automatic updates will keep your product high performing**  
Both the Intesis MAPS configuration tool and the interface's firmware can receive automatic updates to improve the product's functionality.

# Bosch Commercial & VRF systems to Modbus TCP/RTU Application



General	
Net Width (mm)	106
Net Height (mm)	58
Net Depth (mm)	90
Net Weight (g)	240
Packed Width (mm)	130
Packed Height (mm)	85
Packed Depth (mm)	140
Packed Weight (g)	550
Operating Temperature °C Min	-10
Operating Temperature °C Max	60
Storage Temperature °C Min	-30
Storage Temperature °C Max	60
Power Consumption (W)	127
Input Voltage (V)	For DC: 12 .. 36 VDC $\pm 10\%$ , Max: 250 mA For AC: 24 VAC $\pm 10\%$ , 50-60 Hz, Max: 127 mA Recommended voltage: 24 VDC, Max: 127 mA
Power Connector	3-pole
Configuration	Intesis MAPS
Capacity	Up to 4 indoor units.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
AC Model Compatibility	This gateway is compatible with Bosch Air Flux and Mini-VRF systems.

# Bosch Commercial & VRF systems to Modbus TCP/RTU Application



## General

Content of Delivery	Intesis Gateway and Installation Manual.
Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Packaging Material	Cardboard
Warranty (years)	3 years

## Identification and Status

Product ID	IN770AIRXXSO000_MBS_BOS
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	EAR99

## Physical Features

Connectors / Input / Output	Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB.
LED Indicators	Gateway and communication status.
Push Buttons	Factory reset.
DIP & Rotary Switches	EIA-485 serial port configuration.
Contains Battery	No
Battery Description	Manganese Dioxide Lithium button battery.

## Certifications and Standards

ETIM Classification	EC001604
CE	Yes

# Bosch Commercial & VRF systems to Modbus TCP/RTU Application




## Certifications and Standards

CB	Yes
UKCA	Yes
UKPSTI	Yes
UL	Yes
BTL	No
WEEE Category	IT and telecommunications equipment


# Bosch Commercial & VRF systems to Modbus TCP/RTU Application



## Use Case

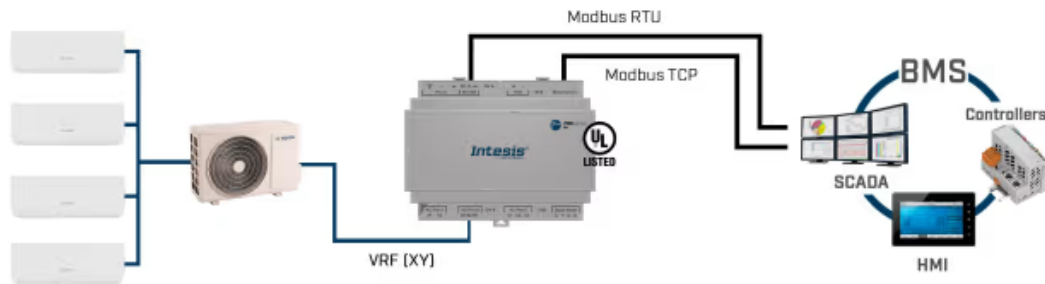

Integration example.

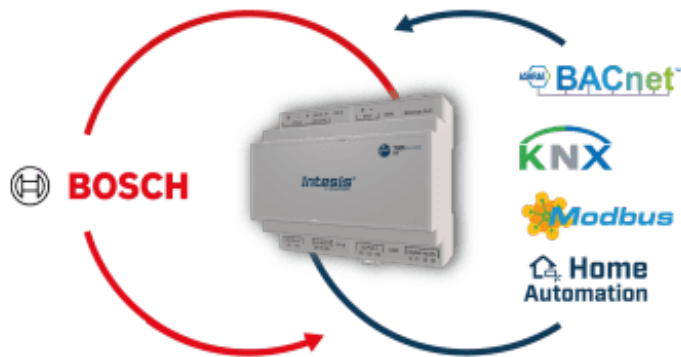

Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation.