

## Mitsubishi Electric City Multi systems to KNX Application

Item number: IN770AIRXXSO000

The Mitsubishi Electric application has been specially designed to allow bidirectional control and monitoring of Mitsubishi Electric City Multi systems from a KNX installation. The solution allows the integration of up to 15 groups from a single interface.



*Mitsubishi Electric to KNX - Up to 15 groups*

### Features and benefits

- ✓ **KNX standard datapoints (DPTs) support**  
KNX standard datapoints (DPTs) are supported, guaranteeing a simple KNX device/system integration.
- ✓ **Automatic identification**  
A scan function is available for automatic identification of the units present in the VRF system.
- ✓ **Individual indoor unit energy consumption signals**  
Energy consumption signals from each indoor unit are available, so they can be checked individually.
- ✓ **Commissioning-friendly approach with Intesis MAPS**  
Templates can be imported and reused as often as needed, significantly reducing commissioning time.
- ✓ **Direct access to the central controller**  
Connection is simple, as the interface is directly connected to the central controller via Ethernet.
- ✓ **Outdoor unit signals**  
Signals assigned to the outdoor unit are available to be used in the integration.
- ✓ **Datapoint support**  
A wide range of monitoring and control datapoints is available.
- ✓ **Configuration tool and interface automatic updates**  
Both the Intesis MAPS configuration tool and the interface's firmware can receive automatic updates.

# Mitsubishi Electric City Multi systems to KNX Application



| General                      |  |
|------------------------------|--|
| Net Width (mm)               | 106  |
| Net Height (mm)              | 58   |
| Net Depth (mm)               | 90   |
| Net Weight (g)               | 240  |
| Packed Width (mm)            | 130  |
| Packed Height (mm)           | 85   |
| Packed Depth (mm)            | 140  |
| Packed Weight (g)            | 550  |
| Operating Temperature °C Min | -10  |
| Operating Temperature °C Max | 60   |
| Storage Temperature °C Min   | -30  |
| Storage Temperature °C Max   | 60   |
| Power Consumption (W)        | 127  |
| Input Voltage (V)            | For DC: 12 .. 36 VDC $\pm 10\%$ , Max: 250 mA For AC: 24 VAC $\pm 10\%$ , 50-60 Hz, Max: 127 mA Recommended voltage: 24 VDC, Max: 127 mA   |
| Power Connector              | 3-pole   |
| Configuration                | Intesis MAPS   |
| Capacity                     | Up to 15 groups.   |
| Installation Conditions      | This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit. |
| AC Model Compatibility       | List of compatible centralized controllers: G-50, G-50A, GB-50A, GB-50ADA, AB-150, AE-200, AE-50, AG-150A, EW-50, EB-50GU.   |

# Mitsubishi Electric City Multi systems to KNX Application



## General

|                            |   |
|----------------------------|---|
| Content of Delivery        | Intesis Gateway and Installation Manual.      |
| Not Included (in delivery) | Power supply not included.                    |
| Mounting                   | DIN rail mount (bracket included), Wall mount |
| Housing Materials          | Plastic                                       |
| Packaging Material         | Cardboard                                     |
| Warranty (years)           | 3 years                                       |

## Identification and Status

|   |                         |
|---|-------------------------|
| Product ID                                  | IN770AIRXXSO000_KNX_MIT |
| Country of Origin                           | Spain                   |
| HS Code                                     | 8517620000              |
| Dual Usage                                  | No                      |
| Export Control Classification Number (ECCN) | EAR99                   |

## Physical Features

|                             |  |
|-----------------------------|--|
| Connectors / Input / Output | Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB.    |
| LED Indicators              | Gateway and communication status.  |
| Push Buttons                | Factory reset. I-Am message (for BACnet only). Normal mode/programming mode switch (for KNX only). |
| DIP & Rotary Switches       | EIA-485 serial port configuration.   |
| Contains Battery            | No   |
| Battery Description         | Manganese Dioxide Lithium button battery.  |

## Certifications and Standards

|                     |          |
|---------------------|----------|
| ETIM Classification | EC001604 |
| CE                  | Yes      |


# Mitsubishi Electric City Multi systems to KNX Application



| Certifications and Standards |                                     |
|------------------------------|-------------------------------------|
| CB                           | Yes                                 |
| UKCA                         | Yes                                 |
| UKPSTI                       | Yes                                 |
| UL                           | Yes                                 |
| WEEE Category                | IT and telecommunications equipment |



## Use Case

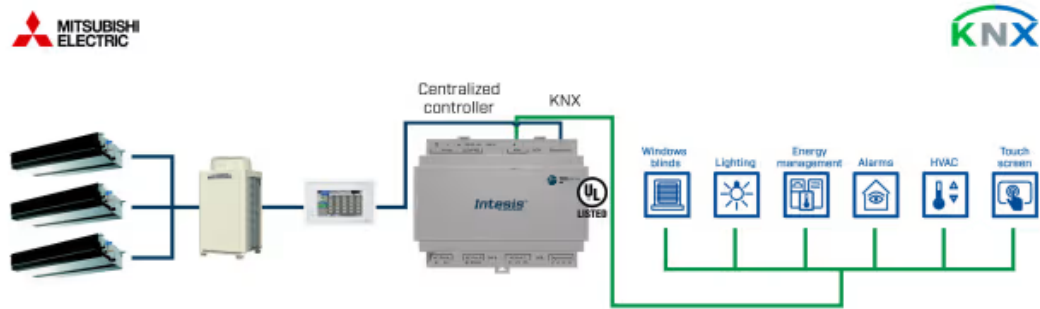

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation