


# Mitsubishi Electric City Multi systems to BACnet/IP & MS/TP Application

Item number: IN770AIRXXSO000

The Mitsubishi Electric application has been specially designed to allow bidirectional control and monitoring of Mitsubishi Electric City Multi systems from a BMS, SCADA, PLC, or any other device working as a BACnet/IP server or a BACnet MS/TP client. The solution allows the integration of up to 15 groups from a single interface.

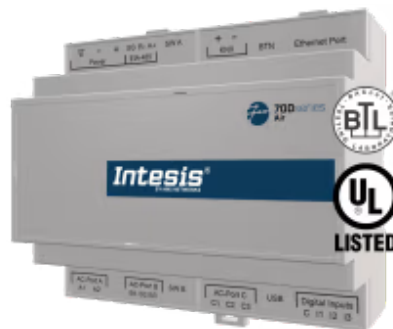

*Mitsubishi Electric to BACnet/IP & MS/TP - Up to 15 groups*

## Features and benefits

 **BACnet/IP and BACnet MS/TP support**

The interface supports both BACnet/IP and BACnet MS/TP protocols.

- ✓ Automatic identification

A scan function is available for automatic identification of the units present in the VRF system.

✔ Individual indoor unit energy consumption signals

Energy consumption signals from each indoor unit are available, so they can be checked individually.

- Commissioning-friendly approach with Intesis MAPS

Templates can be imported and reused as often as needed, significantly reducing commissioning time.

- ✓ Direct access to the central controller

Connection is simple, as the interface is directly connected to the central controller via Ethernet.

### ✓ Outdoor unit signals

Signals assigned to the outdoor unit are available to be used in the integration.

- ✓ Two configuration port options

Configuration of the interface can be carried out through either its IP or USB (Console) port.

- ✔ Configuration tool and interface automatic updates

Both the Intesis MAPS configuration tool and the interface's firmware can receive automatic updates.

# Mitsubishi Electric City Multi systems to BACnet/IP & MS/TP Application



General	
Net Width (mm)	106
Net Height (mm)	58
Net Depth (mm)	90
Net Weight (g)	240
Packed Width (mm)	130
Packed Height (mm)	85
Packed Depth (mm)	140
Packed Weight (g)	550
Operating Temperature °C Min	-10
Operating Temperature °C Max	60
Storage Temperature °C Min	-30
Storage Temperature °C Max	60
Power Consumption (W)	127
Input Voltage (V)	For DC: 12 .. 36 VDC $\pm 10\%$ , Max: 250 mA For AC: 24 VAC $\pm 10\%$ , 50-60 Hz, Max: 127 mA Recommended voltage: 24 VDC, Max: 127 mA
Power Connector	3-pole
Configuration	Intesis MAPS
Capacity	Up to 15 groups.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
AC Model Compatibility	List of compatible centralized controllers: G-50, G-50A, GB-50A, GB-50ADA, AB-150, AE-200, AE-50, AG-150A, EW-50, EB-50GU.

# Mitsubishi Electric City Multi systems to BACnet/IP & MS/TP Application



## General

Content of Delivery	Intesis Gateway and Installation Manual.
Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Packaging Material	Cardboard
Warranty (years)	3 years

## Identification and Status

Product ID	IN770AIRXXSO000_BAC_MIT
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	EAR99

## Physical Features

Connectors / Input / Output	Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB.
LED Indicators	Gateway and communication status.
Push Buttons	Factory reset. I-Am message (for BACnet only). Normal mode/programming mode switch (for KNX only).
DIP & Rotary Switches	EIA-485 serial port configuration.
Contains Battery	No
Battery Description	Manganese Dioxide Lithium button battery.

## Certifications and Standards

ETIM Classification	EC001604
CE	Yes

# Mitsubishi Electric City Multi systems to BACnet/IP & MS/TP Application




Certifications and Standards	
CB	Yes
UKCA	Yes
UKPSTI	Yes
UL	Yes
BTL	Yes
WEEE Category	IT and telecommunications equipment

# Mitsubishi Electric City Multi systems to BACnet/IP & MS/TP Application



## Use Case

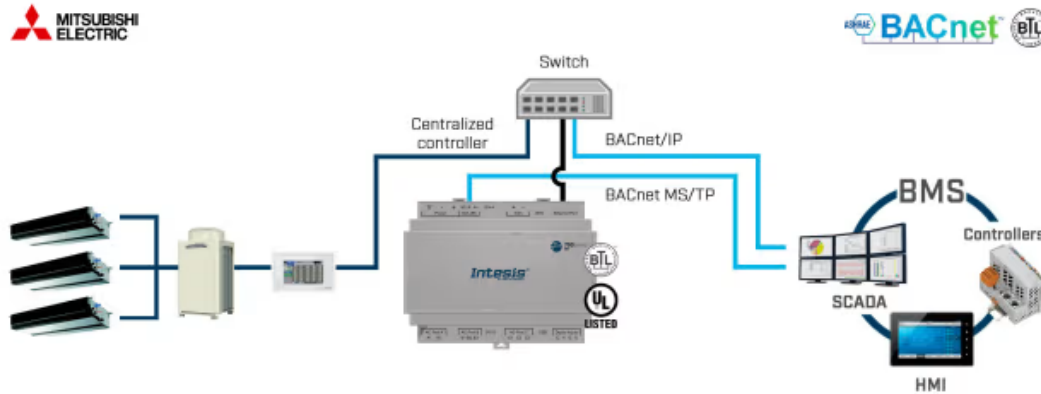

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation