

## Daikin Altherma Air-to-Water heat pumps to BACnet MS/TP



Item number: IN485DAI001A000

This gateway allows full bidirectional communication between Daikin Altherma 3 Air-to-Water heat pumps and BACnet MS/TP networks.

*Daikin Air-to-Water to BACnet MS/TP - 1 AW unit*

### Features and benefits

- ✓ **Easy installation and commissioning**  
The gateway gets its power directly from the AW unit and allows a simple BACnet configuration using DIP Switches.
- ✓ **Energy efficiency and comfort optimization**  
Weather dependent ambient temperature setup.
- ✓ **Local and remote control at the same time**  
This is an additional user interface in the Daikin Altherma 3 installation. It does not replace the Daikin main user interface, which is still required for operation.
- ✓ **Detect outliers and anomalies in the AW system's performance**  
It provides error codes and detailed description, enabling the BACnet system to execute preventive maintenance schedules.
- ✓ **Avoid compatibility issues**  
This gateway is compatible with monoblock and split systems from the Daikin Altherma 3 range.
- ✓ **Total control and monitoring from BACnet MS/TP**  
Through internal variables, running hours counter (for maintenance purposes), and error indication.

# Daikin Altherma Air-to-Water heat pumps to BACnet MS/TP



General	
Net Width (mm)	53
Net Height (mm)	93
Net Depth (mm)	58
Net Weight (g)	120
Packed Width (mm)	140
Packed Height (mm)	85
Packed Depth (mm)	108
Packed Weight (g)	160
Operating Temperature °C Min	0
Operating Temperature °C Max	70
Storage Temperature °C Min	-20
Storage Temperature °C Max	85
Power Consumption (W)	1.4
Input Voltage (V)	From the AW unit.
Power Connector	Other
Isolation Voltage (kV)	1500 VDC
Isolation Resistance (Ohms)	1000 MΩ
Configuration	DIP switch
Capacity	1 Air-to-Water unit.

# Daikin Altherma Air-to-Water heat pumps to BACnet MS/TP



## General

Installation Conditions	Install this gateway indoors, in a restricted access location, avoiding exposure to direct solar radiation, water, high relative humidity, or dust.
AC Model Compatibility	Compatible with Daikin Altherma 3 air-to-water heat pumps.
Content of Delivery	Intesis Gateway, and Installation Manual.
Mounting	DIN rail mount (bracket included)
Housing Materials	Plastic
Packaging Material	Cardboard
Warranty (years)	3 years

## Identification and Status

Product ID	IN485DAI001A000_BAC_DAI
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	EAR99

## Physical Features

Connectors / Input / Output	EIA-485, HVAC port.
LED Indicators	1 x Operational status
DIP & Rotary Switches	3x DIP Switch
Contains Battery	No

## Certifications and Standards

ETIM Classification	EC001604
CE	Yes
CB	Yes


# Daikin Altherma Air-to-Water heat pumps to BACnet MS/TP



Certifications and Standards	
UKCA	Yes
UKPSTI	Yes
UL	Yes
KC	No
BTL	Yes
WEEE Category	IT and telecommunications equipment



## Use Case

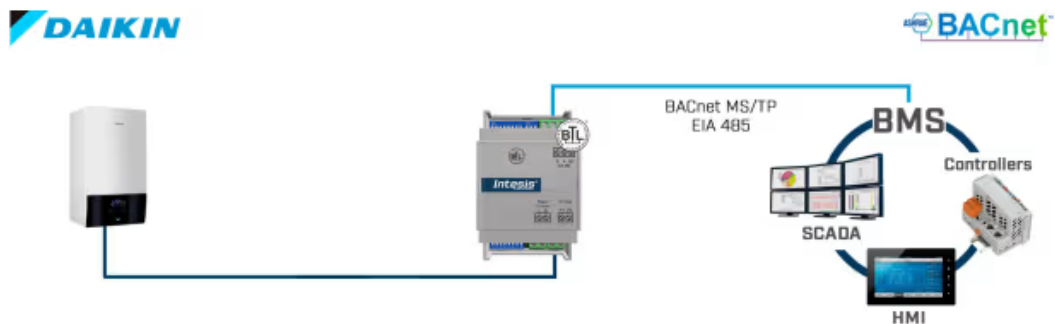

Integration example.