

# Anybus Communicator



## High performance

Instant data transfer of up to 1500 bytes with hardware accelerated endian conversion (byte swap) enables you to take full advantage of high-speed industrial networks.



## Durability

Built using carefully selected industrial components and verified against industry standards. Proven network performance thanks to the market-leading NP40 network processor.



## Product selection

Article nr	Control sys. 1	Device(s)
ABC3100	PROFIBUS	EtherCAT
ABC3100EX	PROFIBUS ATEX	EtherCAT
ABC3107	Ethernet/IP	EtherCAT
ABC3110	Modbus RTU	EtherCAT
ABC3113	PROFINET	EtherCAT
ABC3128	Modbus TCP	EtherCAT
ABC3190	Common Eth.*	EtherCAT
ABC3190EX	Common Eth.* ATEX	EtherCAT

## EtherCAT MainDevice

Need to connect your EtherCAT device to another device running on different industrial networks? The Anybus Communicator has your back! No special cables, software, or training is required.

The EtherCAT MainDevice from Anybus are designed to ensure reliable, secure, and high-speed data transfer between EtherCAT and different industrial Ethernet and Fieldbus networks. Very easy to install and deploy, the stand-alone gateways enable transparent data exchange allowing you to both bridge and integrate legacy equipment into modern high-performance networks.


## Cybersecurity

Designed to keep you safe from cyber-attacks. Secure boot protects you against malicious software and a security switch adds physical protection to prevent unauthorized configuration changes.



## User-friendly

Fast installation and configuration are guaranteed thanks to an intuitive web user interface, ethernet configuration cable, easy-to-understand documentation, and effective housing design.

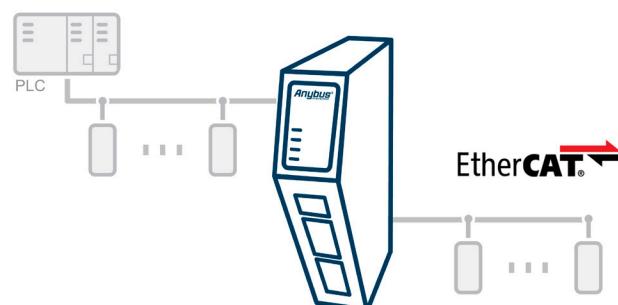

\*Common ethernet: select among EtherNet/IP, Modbus TCP and PROFINET control system



Scan for more info  
about our products

## General

Dimensions with connectors (L x W x H)	98 x 27 x 144 mm / 3.85 x 1.06 x 5.67 in
Weight	150 grams, 0.33 lb
IP rating	IP20
Housing material	PC ABS, UL 94 VO
Mounting	DIN rail (35 * 7,5/15)
Operating temperature	-25 to 70° C, -13 to 158° F
Configuration	Web based via Ethernet configuration port
Industrial network connector(s)	2xRJ45 10/100 Mbit (daisy chaining) / DB9 (PROFIBUS)
Certification	CE, UKCA, UL ord loc (E214107), KC, RMC
MTBF	> 1 500 000 h, Telcordia Method I Case 3 at 30° C

## Power

Input voltage	12- 30 VDC
Current consumption	Typical: 160 mA @ 24V Max: 400 mA @ 12V
Power connector	3-pin plug with screw terminal
Protection	Reverse voltage protection and short circuit protection

## Network specifications

<b>EtherCAT MainDevice</b>	
- Transfer up to 1 500 bytes to EtherCAT SubDevices	- 1ms minimum cycle time*
- Transfer up to 1 500 bytes from EtherCAT SubDevices	- Gateway latency < 1ms (when in sync)
- Total supported cyclic process data: 3000 bytes	- Endian conversion (without affecting latency)
- Up to 24 nodes (SubDevices)	- CAN over EtherCAT (COE)
- Configuration by scanning EtherCAT nodes (SubDevices)	- Live list published as process data
<b>PROFINET IO Device</b>	<b>Modbus TCP Server</b>
- Transfer up to 1 024 bytes from PROFINET	- Transfer up to 1 500 bytes to Modbus TCP
- Transfer up to 1 024 bytes to PROFINET	- Transfer up to 1 500 bytes from Modbus TCP
- Total supported cyclic process data: 2048 bytes	- Total supported process data: 3 000 bytes
- 1 ms minimum cycle time	- 4 connections
- Conformance class B, Real-Time (RT)	- Function codes 01-06, 15-16, 23, 43/14
- Network load robustness, Netload Class III	
<b>Ethernet/IP Adapter</b>	<b>PROFIBUS DP Device (DPV1/DPV0)</b>
- Transfer up to 1 448 bytes to EtherNet/IP	- Transfer up to 244 bytes to PROFIBUS
- Transfer up to 1 448 bytes from EtherNet/IP	- Transfer up to 244 bytes from PROFIBUS
- Total supported cyclic process data: 2896 bytes	- Total supported process data: 488 bytes
- Class 1 and Class 3 connection for process data	- Automatic baud rate detection up to 12 Mbit/s
- Device Level Ring (beacon mode)	- Sync, Freeze and Watchdog
- Quick Connect class B	- I&M Ident numbers 0-31x
* Depending on the application	