

Ixxat CAN-CR120/HV

Item number: 1.01.0210.20010

The Ixxat CAN-CR120/HV repeater with two CAN/CAN FD interfaces provides a galvanic isolation up to 3 kV for enhanced protection of network segments. It improves the CAN bus load capacity, establishes a physical coupling of bus systems and provides the flexibility to optimize network structures. With integrated termination resistors.



CAN/CAN FD repeater with 3 kV galvanic isolation and termination resistor

Features and benefits

- ✓ **Robust industrial use**
Designed for industrial environments, meeting high demands for robustness, temperature ranges, and safety.
- ✓ **Fast and transparent operation**
Minimal impact on real-time behavior, equivalent to a short line length (ca. 35 m/175 ns delay). Enabling transparent transmission, compatible with all higher layer protocols.
- ✓ **Increased system protection up to 3 kV**
Using the CAN-CR120/HV, network components can be galvanically isolated up to 3 kV DC for 1 second. This reliably enhances the protection of the device against damage to electronics caused by voltage peaks.
- ✓ **Integrated bus termination resistors**
Integrated bus termination resistors prevent reflections on the line ends and ensure optimum communication.
- ✓ **Flexibility in CAN FD network design**
Helps to optimize CAN/CAN FD network structures by enabling extended layouts (stub lines, star and tree topologies).
- ✓ **Cost savings due to simple wiring**
Optimized topologies enable simpler wiring, resulting in less cables and cost savings at installation and maintenance.
- ✓ **Network monitoring and fault recovery**
In case of disturbances, the repeater automatically disconnects the affected segment and restores it after the fault is resolved.



General

Related Accessories	1.04.0074.03000
Net Width (mm)	99
Net Height (mm)	113
Net Depth (mm)	22.6
Net Weight (g)	111
Packed Width (mm)	14
Packed Height (mm)	4
Packed Depth (mm)	18
Packed Weight (g)	188
Operating Temperature °C Min	-20
Operating Temperature °C Max	70
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Relative Humidity	10 % to 95 %, non-condensing
Current Consumption Type Value at Vcc Nom (mA)	70
Current Consumption Max value at Vcc nom (mA)	100
Input Voltage (V)	+9 V to +36 V DC
Isolation	3 kV DC for 1 sec.
Content of Delivery	CAN FD repeater, user manual



General

Mounting	DIN rail mount (bracket included)
Housing Materials	Polyamide housing for top hat rail mounting
Packaging Material	Cardboard
Warranty (years)	1

Identification and Status

Product ID	1.01.0210.20010
Successor	1.01.0211.20000
Country of Origin	Germany
HS Code	8517620000
Dual Usage	No

Physical Features

Connectors / Input / Output	2 x screw terminals, 1 x power connector
Contains Battery	No

CAN Features

CAN Mode	CAN high-speed (ISO 11898-2) with CAN choke
CAN Baud Rate	Up to 1 Mbit/s

CAN FD Features

CAN FD Mode	ISO CAN FD, nonISO CAN FD
CAN FD Transceiver	MCP2562FD
CAN FD Baud Rate	Arbitration rate up to 1000 kBit/s, data rate up to 8000 kBit/s (verified by testing). User defined bit rates are possible.

Certifications and Standards

cULus	Yes
Protection Class IP	IP20
Product Certifications	CE, FCC, cULus



Certifications and Standards


WEEE Category	IT and telecommunications equipment
---------------	-------------------------------------



Use Case


Conventional bus structure

The distance between the two nodes furthest apart (1/9) is 220 meters.

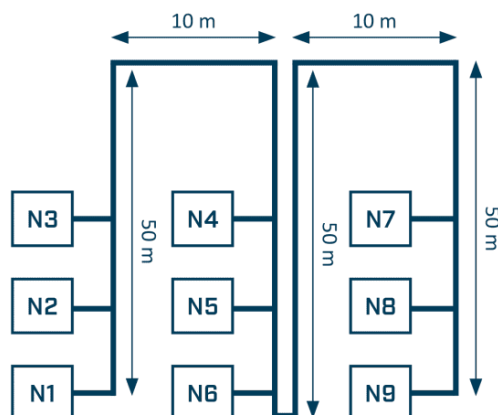

Extended structure with drop line

The distance between the two nodes furthest apart (1/6 or 6/9) is 145 meters.

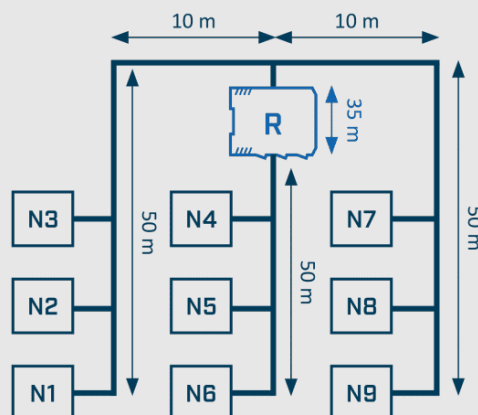

CAN repeaters can be used to better adapt the cable routing to the ambient conditions. Stub lines can be made and the bus structure can be expanded to a star/tree structure, which saves cable lengths. Shorter cable lengths reduce interference on the signal lines and enable higher bit rates. Segments connected via repeaters are galvanically decoupled and therefore offer overvoltage protection for connected participants.