

DALI to BACnet IP Server gateway

Item number: INBACDAL1280200

Designed for the integration of any DALI/DALI-2 driver and DALI-2 input devices with a BACnet BMS or any BACnet/IP or BACnet MS/TP controller. This integration aimed to make DALI devices, their data and resources, accessible from a BACnet-based control system as if they were a part of the BACnet system itself. Please refer to the new product reference for further details.



Replaced by: IN704DAL1280000

Features and benefits

- ✓ **BACnet/IP client and MS/TP manager support**
Both BACnet/IP client and MS/TP manager are supported.
- ✓ **Easy DALI commissioning/integration w/Intesis MAPS**
Integration and DALI commissioning processes are managed via the Intesis MAPS configuration tool.
- ✓ **Integrated DALI power supply**
A DALI power supply is integrated into the gateway, so no external power supply is required.
- ✓ **10000 total signals max, 230 mA current guaranteed**
Up to 10,000 signals can be defined in total, with a guaranteed output current of 230 mA.
- ✓ **Commissioning-friendly approach with Intesis MAPS**
Templates can be imported and reused as often as needed, significantly reducing commissioning time.
- ✓ **DALI/DALI-2 drivers & DALI-2 Input devices Support**
DALI/DALI-2 driver, DALI-2 input device support: push buttons, absolute Eingaben, occupancy/light sensors.
- ✓ **Max 64 drivers/ballasts + 64 DALI-2 input devices**
Supports up to 64 drivers/ballasts + 64 DALI-2 input devices (sensors/push buttons/absolute inputs).
- ✓ **BACnet Advanced features - calendars, schedules...**
BACnet's advanced features, such as calendars, trend logs, schedules, and more, are available.

DALI to BACnet IP Server gateway



General

Net Width (mm)	88
Net Height (mm)	90
Net Depth (mm)	58
Net Weight (g)	194
Packed Width (mm)	125
Packed Height (mm)	85
Packed Depth (mm)	140
Packed Weight (g)	356
Operating Temperature °C Min	0°
Operating Temperature °C Max	50°
Warranty (years)	3 years

Identification and Status

Product ID	INBACDAL1280200
Successor	IN704DAL1280000_BAC_DAL
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No

Physical Features

Contains Battery	No
------------------	----


Certifications and Standards

WEEE Category	IT and telecommunications equipment
---------------	-------------------------------------



Use Case

VERSION SUPPORTING 1 DALI CHANNEL

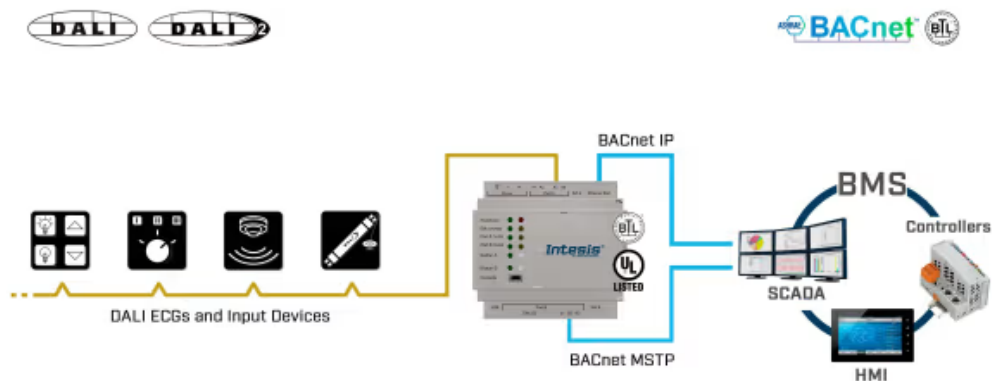

VERSION SUPPORTING 2 DALI CHANNELS

