

## Daikin HVAC to Modbus TCP/RTU Application

Item number: IN770AIR00SO000

The Daikin application has been specially designed to allow bidirectional control and monitoring of Daikin HVAC (DIII-NET) from a BMS, SCADA, PLC, or any other device working as a Modbus client. The solution allows the integration of up to 16 indoor units from a single interface.



*Daikin to Modbus TCP/RTU - Up to 16 Indoor Units*

### Features and benefits

- ✓ **Reduce hardware costs and improve system scalability**  
The gateway is a Modbus server and is able to manage both Modbus TCP and Modbus RTU simultaneously.
- ✓ **Reduce commissioning time**  
Scan the bus and find all the units connected to the HVAC system with their control signals, including outdoor unit indicators.
- ✓ **A gateway for any project's size**  
Choose the license that best fits your needs (XXS - 4 indoor units, OOS - 16 indoor units, OOM - 64 indoor units), or upgrade your current license. Your project's dimensions and budget are covered.
- ✓ **Fast and intuitive project configuration**  
Intesis MAPS is the user-friendly, in-house-developed configuration tool that enables you to maximize the potential of Intesis gateways. Simply select your template and eliminate the need for tedious manual signal mapping.
- ✓ **Minimize the use of installation materials, reduce the installation work**  
The gateway is connected directly to the outdoor units' communication bus. One single gateway enables centralized access to the entire HVAC system.
- ✓ **Enable energy efficiency by controlling the building's main consuming asset**  
The gateway's Power Estimation Algorithm allows you to estimate the energy consumption of each indoor unit connected to the VRF system.
- ✓ **Avoid compatibility issues**  
This gateway is compatible with Daikin SKY Air, VRV, VRV Hydro Box, HRV and Air curtains.
- ✓ **Automatic updates will keep your product high performing**  
Both the Intesis MAPS configuration tool and the interface's firmware can receive automatic updates to improve the product's functionality.



## General

|                              |                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Capacity                     | S: Up to 16 indoor units                                                                                                                                                                                                                                                                                                                                             |
| Net Width (mm)               | 106                                                                                                                                                                                                                                                                                                                                                                  |
| Net Height (mm)              | 90                                                                                                                                                                                                                                                                                                                                                                   |
| Net Depth (mm)               | 58                                                                                                                                                                                                                                                                                                                                                                   |
| Net Weight (g)               | 194                                                                                                                                                                                                                                                                                                                                                                  |
| Packed Width (mm)            | 125                                                                                                                                                                                                                                                                                                                                                                  |
| Packed Height (mm)           | 85                                                                                                                                                                                                                                                                                                                                                                   |
| Packed Depth (mm)            | 140                                                                                                                                                                                                                                                                                                                                                                  |
| Packed Weight (g)            | 356                                                                                                                                                                                                                                                                                                                                                                  |
| Operating Temperature °C Min | 0°                                                                                                                                                                                                                                                                                                                                                                   |
| Operating Temperature °C Max | 60°                                                                                                                                                                                                                                                                                                                                                                  |
| Storage Temperature °C Min   | -30                                                                                                                                                                                                                                                                                                                                                                  |
| Storage Temperature °C Max   | 60                                                                                                                                                                                                                                                                                                                                                                   |
| Power Consumption (W)        | 3                                                                                                                                                                                                                                                                                                                                                                    |
| Input Voltage (V)            | For DC: 12 .. 36 VDC $\pm$ 10%, Max: 250 mA For AC: 24 VAC $\pm$ 10 %, 50-60 Hz, Max: 127 mA Recommended voltage: 24 VDC, Max: 127 mA                                                                                                                                                                                                                                |
| Power Connector              | 3-pole                                                                                                                                                                                                                                                                                                                                                               |
| Configuration                | Intesis MAPS                                                                                                                                                                                                                                                                                                                                                         |
| Installation Conditions      | This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit. |
| AC Model Compatibility       | This gateway is compatible with Daikin SKY Air, VRV, VRV Hydro Box, HRV and Air curtains.                                                                                                                                                                                                                                                                            |



## General

|                                   |                                               |
|-----------------------------------|-----------------------------------------------|
| <b>Content of Delivery</b>        | Intesis gateway and installation manual.      |
| <b>Not Included (in delivery)</b> | Power supply not included.                    |
| <b>Mounting</b>                   | DIN rail mount (bracket included), Wall mount |
| <b>Housing Materials</b>          | Plastic                                       |
| <b>Packaging Material</b>         | Cardboard                                     |
| <b>Warranty (years)</b>           | 3 years                                       |

## Identification and Status

|                          |                         |
|--------------------------|-------------------------|
| <b>Product ID</b>        | IN770AIR00SO000_MBS_DAI |
| <b>Country of Origin</b> | Spain                   |
| <b>HS Code</b>           | 8517620000              |
| <b>Dual Usage</b>        | No                      |

## Physical Features


|                                    |                                                                                                 |
|------------------------------------|-------------------------------------------------------------------------------------------------|
| <b>Connectors / Input / Output</b> | Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB. |
| <b>LED Indicators</b>              | Gateway and communication status.                                                               |
| <b>Push Buttons</b>                | Factory reset.                                                                                  |
| <b>DIP &amp; Rotary Switches</b>   | EIA-485 serial port configuration.                                                              |
| <b>Contains Battery</b>            | No                                                                                              |

## Certifications and Standards

|                               |                                     |
|-------------------------------|-------------------------------------|
| <b>Product Certifications</b> | CE, CB, UKPSTI, UL                  |
| <b>WEEE Category</b>          | IT and telecommunications equipment |



## Use Case

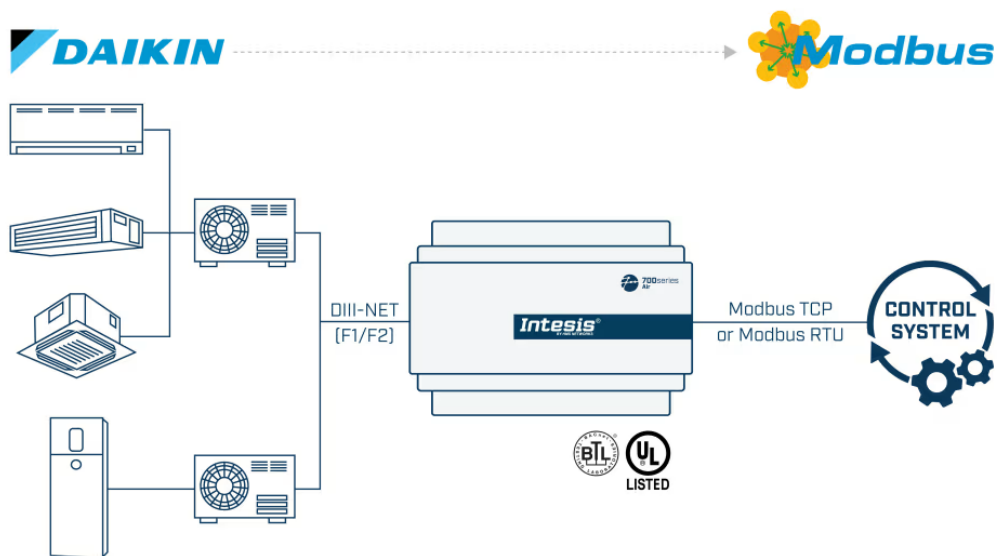

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, MQTT, or Home Automation