Haier HVAC systems to KNX TP



Item number: IN770AIRXXSO000

Integrate Haier MRV units into KNX TP networks for centralized HVAC control and monitoring. This solution allows the integration of up to 4 indoor units.

Haier to KNX - Up to 4 Indoor Units

Features and benefits

Full KNX interoperability

KNX standard datapoints (DPTs) are supported for simple integration into the KNX system.

Reduce commissioning time

Scan the bus and find all the units connected to the HVAC system with their control signals, including outdoor unit indicators.

A gateway for any project's size

Choose the license that best fits your needs (XXS - 4 indoor units, 00S - 16 indoor units, 00M - 64 indoor units), or upgrade your current license. Your project's dimensions and budget are covered.

Fast and intuitive project configuration

Intesis MAPS is the user-friendly, in-house-developed configuration tool that enables you to maximize the potential of Intesis gateways. Simply select your template and eliminate the need for tedious manual signal mapping.

Minimize the use of installation materials, reduce the installation work

The gateway is connected directly to the outdoor units' communication bus. One single gateway enables centralized access to the entire HVAC system.

Enable energy efficiency by controlling the building's main consuming asset

The gateway's Power Estimation Algorithm allows you to estimate the energy consumption of each indoor unit connected to the VRF system.

Avoid compatibility issues

This gateway is compatible with Haier MRV 5, MRV SII, MRV W, and MRV7S systems.

Automatic updates will keep your product high performing

Both the Intesis MAPS configuration tool and the interface's firmware can receive automatic updates to improve the product's functionality.

Haier HVAC systems to KNX TP



General

Capacity	XXS: Up to 4 indoor units
Net Width (mm)	106
Net Height (mm)	90
Net Depth (mm)	58
Net Weight (g)	194
Packed Width (mm)	125
Packed Height (mm)	85
Packed Depth (mm)	140
Packed Weight (g)	356
Operating Temperature °C Min	-10
Operating Temperature °C Max	60
Storage Temperature °C Min	-30
Storage Temperature °C Max	60
Power Consumption (W)	3
Configuration	Intesis MAPS
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
AC Model Compatibility	This gateway is compatible with Haier MRV 5, MRV SII, MRV W, and MRV7S systems.
Content of Delivery	Intesis Gateway and Installation Manual.
Not Included (in delivery)	Power supply not included.

Haier HVAC systems to KNX TP



General

Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Packaging Material	Cardboard
Warranty (years)	3 years

Identification and Status

Product ID	IN770AIRXXSO000_KNX_HAI
Predecessor	INKNXHAI008C000
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No


Physical Features

LED Indicators	Gateway and communication status.
Push Buttons	Factory reset. Normal mode/programming mode switch (for KNX only).
Contains Battery	No

Certifications and Standards

Product Certifications	CE, CB, UKPSTI, UL
WEEE Category	IT and telecommunications equipment

Use Case

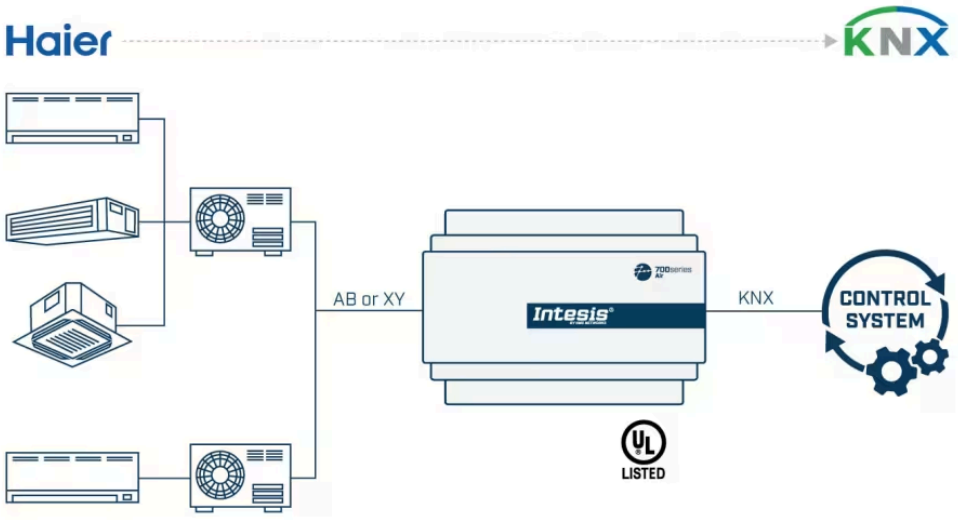

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, MQTT, or Home Automation