

Panasonic Air to Water (Aquarea H/J) to Modbus RTU Interface

Item number: INMBSPAN001A000

This Panasonic-Modbus interface was designed to allow full bidirectional communication between Panasonic Air to Water (Aquarea H/J) units and Modbus RTU (RS-485) networks. The interface acted as a server device for the installation, accessing all signals from the Air to Water unit. Please refer to the new product reference for further details.

Replaced by: INMBSPAN001A100

Features and benefits

- ✓ **Modbus RTU (EIA-485) server device**
The interface acts as a Modbus server device through its Modbus RTU (EIA-485 connector) port.
- ✓ **Energy savings through a window contact function**
This function helps minimize costs, as HVAC systems are a major building energy consumer.
- ✓ **AC unit control by both the remote and Modbus RTU**
The AC unit can be simultaneously controlled by the manufacturer's remote controller and Modbus RTU.
- ✓ **Multiple mounting options**
Mounting options include DIN rail, wall, or, in some AC models, even inside the indoor unit.
- ✓ **Dual configuration options**
Configuration is carried out through the interface's onboard DIP switches and the Modbus interface.
- ✓ **Total unit control and monitoring from Modbus RTU**
Through internal variables, running hours counter (for maintenance purposes), and error indication.
- ✓ **No external power required**
The interface is powered directly from the AC unit, so no external power supply is required.

Panasonic Air to Water (Aquarea H/J) to Modbus RTU Interface



General	
Capacity	1 AW unit
Net Width (mm)	53
Net Height (mm)	93
Net Depth (mm)	58
Net Weight (g)	100
Packed Width (mm)	135
Packed Height (mm)	85
Packed Depth (mm)	100
Packed Weight (g)	120
Operating Temperature °C Min	0°
Operating Temperature °C Max	60°
Storage Temperature °C Min	-20
Storage Temperature °C Max	85
Power Consumption (W)	1.2
Configuration	DIP switch
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis gateway and installation manual.
Housing Materials	Plastic
Warranty (years)	3 years

Panasonic Air to Water (Aquarena H/J) to Modbus RTU Interface



General	
Packaging Material	Cardboard
Identification and Status	
Product ID	INMBSPAN001A000
Successor	INMBSPAN001A100
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No
Physical Features	
LED Indicators	1 x Operational status
Contains Battery	No
Certifications and Standards	
Product Certifications	CE, CB, UKPSTI, UL
WEEE Category	IT and telecommunications equipment


Panasonic Air to Water (Aquarea H/J) to Modbus RTU Interface

 Banner

Use Case

Panasonic

Modbus

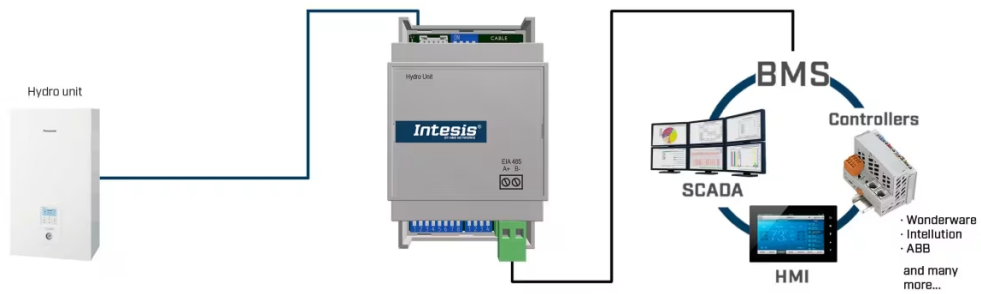

Integration example.