

## Anybus Communicator – PROFINET IO Device to PROFIBUS DP Device

Item number: ABC4023-A

The Anybus Communicator PROFINET IO Device to PROFIBUS DP Device enables you to connect any PROFINET IO control system to any PROFIBUS DP control system. Anybus Communicators ensure reliable, secure, high-speed data transfers between different industrial networks. Thanks to our intuitive web-based user interface, they're also incredibly easy to use.



*A protocol converter that connects PROFINET IO and PROFIBUS DP control systems*

### Features and benefits

- ✓ **Intuitive user interface**  
Use the intuitive web-based user interface to easily configure the Communicator via the drag-and-drop functionality or to analyze live data, export log files, and generate support packages.
- ✓ **High performance**  
Powered by the award-winning NP40 network processor and high-end components, the Communicator meets the constantly growing demand for more data to be transferred faster.
- ✓ **Instant data transfer**  
Instant data transfer lets you take advantage of high-speed industrial networks, as the Communicator provides hardware-accelerated endian conversion (byte swap), saving processing time on the PLC.
- ✓ **Ensures uptime**  
Thanks to carefully selected industrial components the Communicator operates reliably in harsh industrial environments ensuring uptime and a long life.
- ✓ **Brand Labeling**  
Pre-configure the Communicator and customize the hardware and user interface with your colors and logos.
- ✓ **Cybersecurity**  
The secure boot protects against malware, while a security switch locks configurations to prevent unauthorized changes. Ports used in production are disabled to add another layer of security.
- ✓ **Optimized hardware design**  
The Communicator has forward-facing ports and is designed for IP20 and DIN-rail mounting, enabling you to install it with ease, close to connected devices, thereby reducing wiring requirements.
- ✓ **5-year warranty**  
The Communicator is made to be durable and have a long life. We're so confident in its quality that we provide a 5-year warranty.
- ✓ **Instant diagnostics**  
The user interface displays real-time connection status and I/O data mapping for easy troubleshooting. Easily generate a support file containing all the necessary information.
- ✓ **Life cycle management**  
HMS maintains every part of the Communicator, including network updates, throughout the product's lifecycle.

# Anybus Communicator – PROFINET IO Device to PROFIBUS DP Device



General	
Net Width (mm)	27
Net Height (mm)	144
Net Depth (mm)	98
Net Weight (g)	150
Packed Width (mm)	12
Packed Height (mm)	2
Packed Depth (mm)	8
Packed Weight (g)	185
Operating Temperature °C Min	-25
Operating Temperature °C Max	70
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Current Consumption Type Value at Vcc Nom (mA)	90mA @ 24V DC (2.2W)
Current Consumption Max value at Vcc nom (mA)	125mA @24V DC (3W)
Input Voltage (V)	12-30V DC
Power Connector	3-pin, 5.08 Phoenix plug connector
Isolation	TRUE
Mounting	DIN-rail (EN 50022 standard)
Housing Materials	PC ABS, UL 94 VO

# Anybus Communicator – PROFINET IO Device to PROFIBUS DP Device



## General

Packaging Material	Cardboard
Warranty (years)	5

## Identification and Status

Product ID	ABC4023-A
Model Code	40-ETH-PDP-A
Predecessor	AB7652-F
Country of Origin	Sweden
HS Code	8517620000
Export Control Classification Number (ECCN)	5A991.b.1

## Physical Features

Connectors / Input / Output	2x RJ45, 1x D-sub 9-pin female PROFIBUS connector, RJ45 Config port
Push Buttons	Factory reset
DIP & Rotary Switches	Security lock switch

## PROFIBUS Features

PROFIBUS Mode	Slave
PROFIBUS Supported Functionality	PROFIBUS-DP Slave functionality according to extensions of EN 50170
PROFIBUS Device Address	0-125
PROFIBUS Configuration File	GSD available
PROFIBUS Baud Rate	9600 bit/s - 12 Mbit/s
PROFIBUS Input Data Size	244 bytes
PROFIBUS Output Data Size	244 bytes

## PROFINET Features

PROFINET Mode	Slave
---------------	-------

# Anybus Communicator – PROFINET IO Device to PROFIBUS DP Device



## PROFINET Features

<b>PROFINET Supported Functionality</b>	RT; Daisy chaining;
<b>PROFINET Conformance Class</b>	Class B
<b>PROFINET Configuration File</b>	GSDML available
<b>PROFINET Bandwidth</b>	10/100MBit down to 1ms cycle time
<b>PROFINET Input Data Size</b>	1024 bytes
<b>PROFINET Output Data Size</b>	1024 bytes


## Certifications and Standards

<b>Protection Class IP</b>	IP20
<b>Recycle / Disposal</b>	TRUE
<b>UL Information</b>	E214107: Ord.Loc UL 61010-1, CSA C22.2 No. 61010-1, UL 61010-2-201, CSA C22.2 No. 61010-2-201
<b>ATEX Information</b>	II 3 G Ex ec IIC T4 Gc, EN IEC 60079-0, 60079-7, IEC 60664-1
<b>Environment</b>	EN 55016-2-3 Class A, EN 55032 Class A, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6
<b>WEEE Category</b>	IT and telecommunications equipment

# Anybus Communicator – PROFINET IO Device to PROFIBUS DP Device



## Use Case

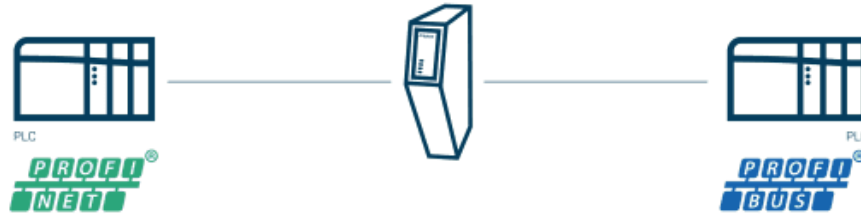

The communicator can be used wherever there is a need to transfer data between control systems using different industrial protocols.