

Anybus Communicator – EtherCAT slave to PROFIBUS DP Device

Item number: ABC4021-A

The Anybus Communicator EtherCAT slave to PROFIBUS DP Device enables you to connect any EtherCAT control system to any PROFIBUS control system. Anybus Communicators ensure reliable, secure, high-speed data transfers between different industrial networks. Thanks to our intuitive web-based user interface, they're also incredibly easy to use.



A protocol converter that connects EtherCAT and PROFIBUS DP control systems

Features and benefits

- ✓ **Intuitive user interface**
Use the intuitive web-based user interface to easily configure the Communicator via the drag-and-drop functionality or to analyze live data, export log files, and generate support packages.
- ✓ **High performance**
Powered by the award-winning NP40 network processor and high-end components, the Communicator meets the constantly growing demand for more data to be transferred faster.
- ✓ **Instant data transfer**
Instant data transfer lets you take advantage of high-speed industrial networks, as the Communicator provides hardware-accelerated endian conversion (byte swap), saving processing time on the PLC.
- ✓ **Ensures uptime**
Thanks to carefully selected industrial components the Communicator operates reliably in harsh industrial environments ensuring uptime and a long life.
- ✓ **Brand Labeling**
Pre-configure the Communicator and customize the hardware and user interface with your colors and logos.
- ✓ **Cybersecurity**
The secure boot protects against malware, while a security switch locks configurations to prevent unauthorized changes. Ports used in production are disabled to add another layer of security.
- ✓ **Optimized hardware design**
The Communicator has forward-facing ports and is designed for IP20 and DIN-rail mounting, enabling you to install it with ease, close to connected devices, thereby reducing wiring requirements.
- ✓ **5-year warranty**
The Communicator is made to be durable and have a long life. We're so confident in its quality that we provide a 5-year warranty.
- ✓ **Instant diagnostics**
The user interface displays real-time connection status and I/O data mapping for easy troubleshooting. Easily generate a support file containing all the necessary information.
- ✓ **Life cycle management**
HMS maintains every part of the Communicator, including network updates, throughout the product's lifecycle.

Anybus Communicator – EtherCAT slave to PROFIBUS DP Device



General	
Net Width (mm)	27
Net Height (mm)	144
Net Depth (mm)	98
Net Weight (g)	150
Packed Width (mm)	12
Packed Height (mm)	2
Packed Depth (mm)	8
Packed Weight (g)	185
Operating Temperature °C Min	-25
Operating Temperature °C Max	70
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Current Consumption Type Value at Vcc Nom (mA)	90mA @ 24V DC (2.2W)
Current Consumption Max value at Vcc nom (mA)	125mA @24V DC (3W)
Input Voltage (V)	12-30V DC
Power Connector	3-pin, 5.08 Phoenix plug connector
Isolation	TRUE
Mounting	DIN-rail (EN 50022 standard)
Housing Materials	PC ABS, UL 94 VO

Anybus Communicator – EtherCAT slave to PROFIBUS DP Device



General

Packaging Material	Cardboard
Warranty (years)	5

Identification and Status

Product ID	ABC4021-A
Model Code	40-ETH-PDP-A
Predecessor	AB7685-F
Country of Origin	Sweden
HS Code	8517620000
Export Control Classification Number (ECCN)	5A991.b.1

Physical Features

Connectors / Input / Output	2xRJ45, 1x D-sub 9-pin female PROFIBUS connector, RJ45 Config port
Push Buttons	Factory reset
DIP & Rotary Switches	Security lock switch

EtherCAT Features

EtherCAT Mode	Slave / SubDevice
EtherCAT Supported Functionality	COE (Can Over EtherCAT); PDO, SDO; APRD, ARMW, APWR, BRD, BWR, FPRD, FPRW, FPWR, FRMW, LRD, LRW, LWR
EtherCAT Configuration File	ESI available
EtherCAT Bandwidth	10/100 Mbit down to 100us cycle time
EtherCAT Input Data Size	1486 bytes
EtherCAT Output Data Size	1486 bytes

PROFIBUS Features

PROFIBUS Mode	Slave
PROFIBUS Supported Functionality	PROFIBUS-DP Slave functionality according to extensions of EN 50170

Anybus Communicator – EtherCAT slave to PROFIBUS DP Device



PROFIBUS Features


PROFIBUS Device Address	0-125
PROFIBUS Configuration File	GSD available
PROFIBUS Baud Rate	9600 bit/s - 12 Mbit/s
PROFIBUS Input Data Size	244 bytes
PROFIBUS Output Data Size	244 bytes

Certifications and Standards

Protection Class IP	IP20
Recycle / Disposal	TRUE
UL Information	E214107: Ord.Loc UL 61010-1, CSA C22.2 No. 61010-1, UL 61010-2-201, CSA C22.2 No. 61010-2-201
ATEX Information	II 3 G Ex ec IIC T4 Gc, EN IEC 60079-0, 60079-7, IEC 60664-1
Environment	EN 55016-2-3 Class A, EN 55032 Class A, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6
WEEE Category	IT and telecommunications equipment



Use Case

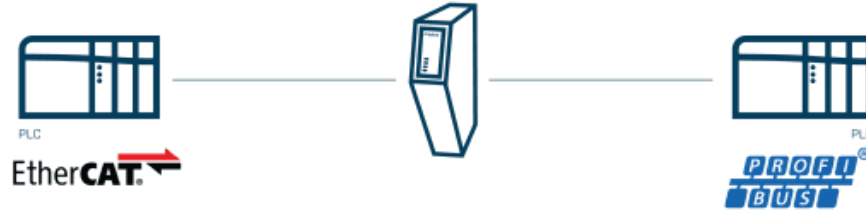

The communicator can be used wherever there is a need to transfer data between control systems using different industrial protocols.