

Anybus Communicator – EtherCAT MainDevice to Common Ethernet

Item number: ABC3190-A

The Anybus Communicator EtherCAT MainDevice to Common Ethernet enables you to connect any EtherCAT device to PROFINET, EtherCAT, EtherNet/IP, or Modbus TCP control systems. Anybus Communicators ensure reliable, secure, and high-speed data transfers. Thanks to the intuitive user interface, they're also incredibly easy to use.



A protocol converter that connects EtherCAT devices to Industrial Ethernet networks

Features and benefits

- ✓ **Intuitive user interface**
Use the intuitive web-based user interface to easily configure the Communicator via the drag-and-drop functionality or to analyze live data, export log files, and generate support packages.
- ✓ **High performance**
Powered by the award-winning NP40 network processor and high-end components, the Communicator meets the constantly growing demand for more data to be transferred faster.
- ✓ **Instant data transfer**
Instant data transfer lets you take advantage of high-speed industrial networks, as the Communicator provides hardware-accelerated endian conversion (byte swap), saving processing time on the PLC.
- ✓ **Instant diagnostics**
The user interface displays real-time connection status and I/O data mapping for easy troubleshooting. Easily generate a support file containing all the necessary information.
- ✓ **Life cycle management**
HMS maintains every part of the Communicator, including network updates, throughout the product's lifecycle.
- ✓ **Cybersecurity**
The secure boot protects against malware, while a security switch locks configurations to prevent unauthorized changes. Ports used in production are disabled to add another layer of security.
- ✓ **Optimized hardware design**
The Communicator has forward-facing ports and is designed for IP20 and DIN-rail mounting, enabling you to install it with ease, close to connected devices, thereby reducing wiring requirements.
- ✓ **5-year warranty**
Thanks to carefully selected industrial components the Communicator operates reliably in harsh environments, ensuring uptime and longevity. Our confidence in quality is reflected in a 5-year warranty.
- ✓ **Brand Labeling**
Pre-configure the Communicator and customize the hardware and user interface with your colors and logos.

Anybus Communicator – EtherCAT MainDevice to Common Ethernet



General	
Net Width (mm)	27
Net Height (mm)	144
Net Depth (mm)	98
Net Weight (g)	150
Packed Width (mm)	12
Packed Height (mm)	2
Packed Depth (mm)	8
Packed Weight (g)	185
Operating Temperature °C Min	-25
Operating Temperature °C Max	70
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Current Consumption Type Value at Vcc Nom (mA)	90mA @ 24V DC (2.2W)
Current Consumption Max value at Vcc nom (mA)	125mA @24V DC (3W)
Input Voltage (V)	12-30V DC
Power Connector	3-pin, 5.08 Phoenix plug connector
Isolation	TRUE
Mounting	DIN-rail (EN 50022 standard)
Housing Materials	PC ABS, UL 94 VO

Anybus Communicator – EtherCAT MainDevice to Common Ethernet



General

Packaging Material	Cardboard
Warranty (years)	5

Identification and Status

Product ID	ABC3190-A
Model Code	40-ETH-ETH-B
Country of Origin	Sweden
HS Code	8517620000
Export Control Classification Number (ECCN)	5A991.b.1

Physical Features

Connectors / Input / Output	2xRJ45, 2xRJ45, 2x RJ45, 2xRJ45, RJ45 Config port
Push Buttons	Factory reset

EtherCAT Features

EtherCAT Mode	Master / MainDevice
EtherCAT Supported Functionality	COE (Can Over EtherCAT); PDO; Scan only
EtherCAT No. Of Subordinate Devices	24 Slaves / SubDevices
EtherCAT Bandwidth	10/100 Mbit down to 1ms cycle time
EtherCAT Input Data Size	1500 bytes
EtherCAT Output Data Size	1500 bytes

EtherNet/IP Features

EtherNet/IP Mode	Adapter / Slave
EtherNet/IP Supported Functionality	Endian conversion (byte swap); QoS; Ethernet/IP Class 1 and 3; Quick Connect Class B; DLR (beacon mode); Daisy Chainging; CT19 ODVA Conformance
EtherNet/IP Configuration File	EDS available
EtherNet/IP Bandwidth	10/100MBit down to 1ms cycle time

Anybus Communicator – EtherCAT MainDevice to Common Ethernet



EtherNet/IP Features

EtherNet/IP Input Data Size	1448 bytes
EtherNet/IP Output Data Size	1448 bytes

Modbus-TCP Features

Modbus-TCP Mode	Slave / Server
Modbus-TCP Supported Functionality	Modbus specification V1.1b3; 4 connections; Daisy chaining
Modbus-TCP Functions Supported	1, 2, 3, 4, 5, 6, 15, 16, 23, 43/14
Modbus-TCP Bandwidth	10/100 Mbit/s
Modbus-TCP Input Data Size	1500 bytes
Modbus-TCP Output Data Size	1500 bytes

PROFINET Features

PROFINET Mode	Slave
PROFINET Supported Functionality	RT; Daisy chaining;
PROFINET Conformance Class	Class B
PROFINET Configuration File	GSDML available
PROFINET Bandwidth	10/100MBit down to 1ms cycle time
PROFINET Input Data Size	1024 bytes
PROFINET Output Data Size	1024 bytes

Certifications and Standards

Protection Class IP	IP20
UL Information	E214107: Ord.Loc UL 61010-1, CSA C22.2 No. 61010-1, UL 61010-2-201, CSA C22.2 No. 61010-2-201
ATEX Information	II 3 G Ex ec IIC T4 Gc, EN IEC 60079-0, 60079-7, IEC 60664-1
Environment	EN 55016-2-3 Class A, EN 55032 Class A, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6

Anybus Communicator – EtherCAT MainDevice to Common Ethernet




Certifications and Standards

WEEE Category

IT and telecommunications equipment



Use Case

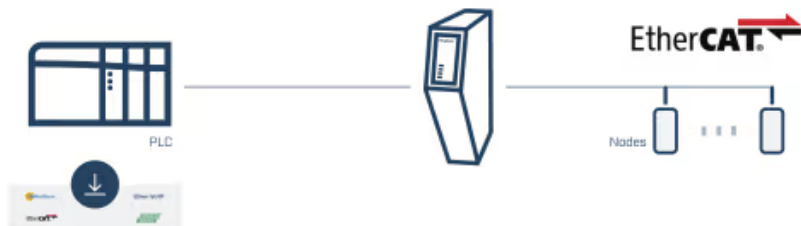

The communicator can be used wherever there is a need to transfer data between control systems using different industrial protocols.