

Mitsubishi Electric Domestic, Mr.Slim and City Multi to BACnet MS/TP Interface

Item number: IN485MIT001I000

The Mitsubishi Electric-BACnet interface allows full bidirectional communication between Mitsubishi Electric domestic, Mr. Slim, and City Multi air conditioner units and BACnet MS/TP networks. The interface enables BACnet communication via polling or subscription requests (COV), making the indoor unit available through independent BACnet objects.

Mitsubishi Electric Domestic to BACnet MS/TP - 1 indoor unit

Features and benefits

- ✓ **BACnet MS/TP support only**
Only the BACnet MS/TP protocol is supported.
- ✓ **AC unit data served as fixed BACnet Objects**
Air conditioning unit properties and functionalities are abstracted into fixed BACnet Objects.
- ✓ **Total unit control and monitoring from BACnet**
Through internal variables, running hours counter (for maintenance purposes), and error indication.
- ✓ **AC unit control by remote and BACnet MS/TP**
The AC unit can simultaneously be controlled via BACnet MS/TP and its own remote controller.
- ✓ **Configuration from onboard DIP switches**
The interface configuration is carried out directly through its onboard DIP switches.
- ✓ **Occupancy function to allow energy savings**
Occupancy function that helps reduce costs, as HVAC systems are one of the main energy consumers.
- ✓ **Supports silent mode**
The interface supports silent mode, allowing for the AC unit's quiet operation.
- ✓ **No external power required**
The interface is powered directly from the AC unit, so no external power supply is required.

Mitsubishi Electric Domestic, Mr.Slim and City Multi to BACnet MS/TP Interface



General	
Net Width (mm)	53
Net Height (mm)	58
Net Depth (mm)	93
Net Weight (g)	180
Operating Temperature °C Min	0
Operating Temperature °C Max	70
Input Voltage (V)	From the AC unit.
Power Connector	Other
Capacity	1 indoor unit.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway, Installation Manual, AC Connection cable.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Warranty (years)	3 years
Packaging Material	Cardboard

Identification and Status	
Product ID	IN485MIT001I000
Country of Origin	Spain
HS Code	8517620000
Export Control Classification Number (ECCN)	EAR99

Mitsubishi Electric Domestic, Mr.Slim and City Multi to BACnet MS/TP Interface



Physical Features

Connectors / Input / Output	EIA-485, HVAC port.
LED Indicators	AC and network status.
DIP & Rotary Switches	EIA-485 serial port configuration.


Certifications and Standards

ETIM Classification	EC001604
WEEE Category	IT and telecommunications equipment

Mitsubishi Electric Domestic, Mr.Slim and City Multi to BACnet MS/TP Interface



Use Case

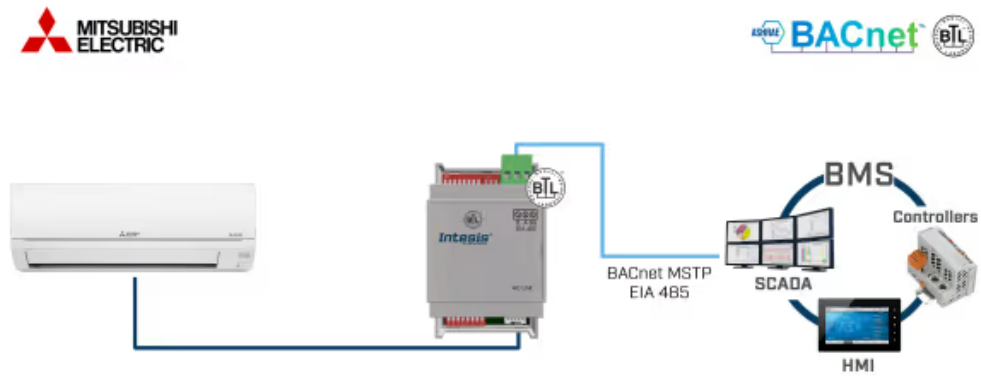

Integration example.