

## M-BUS to Modbus TCP & RTU Server Gateway

Item number: INMBSMEB1200000

Integrate any M-Bus device with a Modbus BMS or any Modbus TCP or Modbus RTU controller. This integration aims to make M-Bus devices, their registers, and resources accessible from a Modbus-based control system or device as if they were a part of the Modbus system and vice versa.



*M-BUS to Modbus TCP & RTU - 120 devices*

### Features and benefits

- ✓ **Up to six concurrent Modbus TCP clients supported**  
The gateway supports up to six simultaneous Modbus TCP clients.
- ✓ **Easy integration with Intesis MAPS**  
The integration process is quickly and easily managed using the Intesis MAPS configuration tool.
- ✓ **Configuration tool and gateway automatic updates**  
Both the Intesis MAPS configuration tool and the gateway's firmware can receive automatic updates.
- ✓ **Embedded M-Bus level converter**  
An M-Bus level converter is embedded in the gateway, so no external one is required.
- ✓ **Support for both Modbus RTU and Modbus TCP**  
The gateway supports both Modbus RTU and Modbus TCP protocols.
- ✓ **Commissioning-friendly approach with Intesis MAPS**  
Templates can be imported and reused as often as needed, significantly reducing commissioning time.
- ✓ **Automatic meter detection and register discovery**  
A scan function is available for automatic identification of M-Bus devices and registers discovery.



## General

Net Width (mm)	88
Net Height (mm)	90
Net Depth (mm)	58
Net Weight (g)	159
Packed Width (mm)	127
Packed Height (mm)	86
Packed Depth (mm)	140
Packed Weight (g)	184
Operating Temperature °C Min	0
Operating Temperature °C Max	60
Storage Temperature °C Min	-30
Storage Temperature °C Max	60
Power Consumption (W)	13
Input Voltage (V)	24VDC +/-10%.
Power Connector	3-pole
Configuration	Intesis MAPS
Capacity	Up to 120 meters.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway, Installation Manual, USB Configuration cable.



## General

Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Warranty (years)	3 years
Packaging Material	Cardboard

## Identification and Status

Product ID	INMBSMEB1200000
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	EAR99

## Physical Features

Connectors / Input / Output	Power supply, KNX, MBUS, Ethernet, Console port USB, USB storage.
LED Indicators	Gateway and communication status.
DIP & Rotary Switches	EIA-485 serial port configuration.
Contains Battery	Yes
Battery Description	Manganese Dioxide Lithium button battery.

## Certifications and Standards

ETIM Classification	EC001604
CE	Yes
CB	Yes
UKPSTI	Yes




## Certifications and Standards

UL	Yes
KC	Yes
WEEE Category	IT and telecommunications equipment



## Use Case

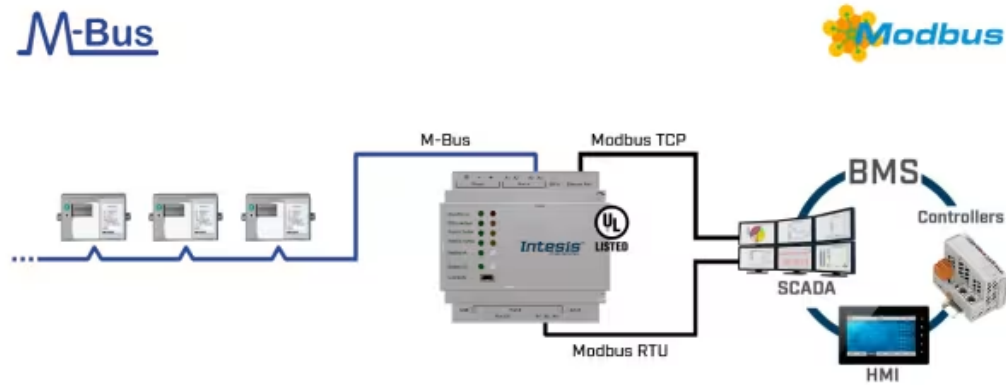

Integration example.