

Mitsubishi Heavy Industries VRF systems to Home Automation Application

Item number: IN776MHI00LO000

The Mitsubishi Heavy Industries application has been specially designed to allow bidirectional control and monitoring of Mitsubishi Heavy Industries VRF systems from a Home Automation system. The solution allows the integration of up to 128 indoor units from a single interface.



*Mitsubishi Heavy Industries to Home Automation - Up to
128 Indoor Units*

Features and benefits

- ✓ **IP Home Automation integration**
Thanks to our open ASCII protocol integration of any IP Home Automation System is easily achievable.
- ✓ **Direct Ethernet connection**
The interface is directly connected via Ethernet to the home's local IP network,
- ✓ **Outdoor unit signals**
Signals assigned to the outdoor unit are available to be used in the integration.
- ✓ **Driver compatibility**
A wide range of compatible drivers is available on the Intesis webpage.
- ✓ **Direct access to the outdoor unit**
Connection is simple, as the interface connects directly to the outdoor unit's communication bus.
- ✓ **Automatic identification**
A scan function is available for automatic identification of the units present in the VRF system.
- ✓ **Multiple TCP client support**
The interface supports up to 6 TCP clients (incoming sockets).
- ✓ **Commissioning-friendly approach with Intesis MAPS**
Templates can be imported and reused as often as needed, significantly reducing commissioning time.

Mitsubishi Heavy Industries VRF systems to Home Automation Application



General	
Net Width (mm)	106
Net Height (mm)	58
Net Depth (mm)	90
Net Weight (g)	240
Packed Width (mm)	130
Packed Height (mm)	85
Packed Depth (mm)	140
Packed Weight (g)	550
Operating Temperature °C Min	-10
Operating Temperature °C Max	60
Storage Temperature °C Min	-30
Storage Temperature °C Max	60
Power Consumption (W)	127
Input Voltage (V)	For DC: 12 .. 36 VDC $\pm 10\%$, Max: 250 mA For AC: 24 VAC $\pm 10\%$, 50-60 Hz, Max: 127 mA Recommended voltage: 24 VDC, Max: 127 mA
Power Connector	3-pole
Configuration	Intesis MAPS
Capacity	This gateway can support up to 128 indoor units when signals from the outdoor units are disabled. It can also support up to 80 indoor and 12 outdoor units.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway and Installation Manual.

Mitsubishi Heavy Industries VRF systems to Home Automation Application



General

Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Warranty (years)	3 years
Packaging Material	Cardboard

Identification and Status

Product ID	IN776MHI00LO000_WMP_MHI
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	EAR99

Physical Features

Connectors / Input / Output	Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB.
LED Indicators	Gateway and communication status.
Push Buttons	Factory reset. I-Am message (for BACnet only). Normal mode/programming mode switch (for KNX only).
DIP & Rotary Switches	EIA-485 serial port configuration.
Contains Battery	No
Battery Description	Manganese Dioxide Lithium button battery.

Certifications and Standards

ETIM Classification	EC001604
CE	Yes
CB	Yes

Mitsubishi Heavy Industries VRF systems to Home Automation Application




Certifications and Standards

UKCA	Yes
UKPSTI	Yes
UL	Yes
WEEE Category	IT and telecommunications equipment

Mitsubishi Heavy Industries VRF systems to Home Automation Application



Use Case

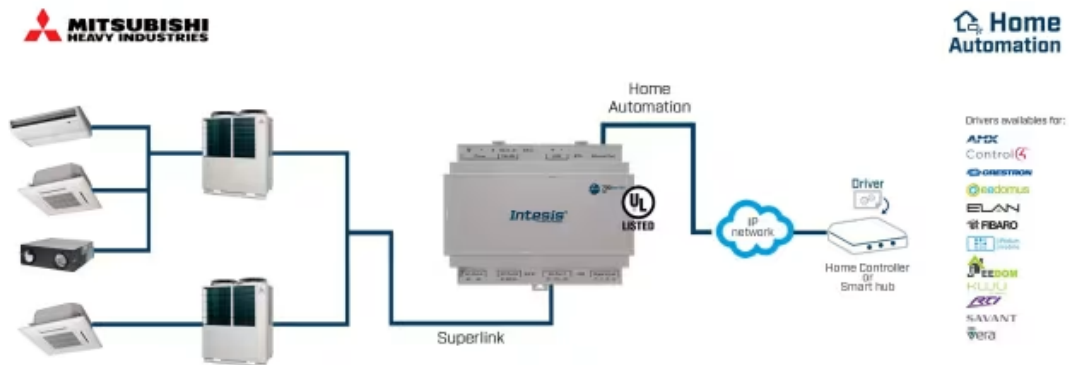

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation