

## Anybus Communicator - Ethernet/IP Scanner to Modbus RTU Server

Item number: ABC3310-A

The Anybus Communicator EtherNet/IP scanner to Modbus RTU server enables you to connect any EtherNet/IP device to Modbus RTU control systems. Anybus Communicators ensure reliable, secure, and high-speed data transfer between different industrial networks. Thanks to our intuitive web-based user interface, they're also incredibly easy to use.



*A protocol converter that connects EtherNet/IP devices to Modbus TCP control systems*

### Features and benefits

- ✓ **Connect 32 adapters with EDS import**  
Supports up to 32 adapters, 500 bytes per connection (Class 1 Exclusive Owner), and an RPI down to 1 ms for demanding applications. Import EDS files via the web interface for easy mapping or configure connections manually.
- ✓ **Instant data transfer**  
The Communicator transfers data instantly between networks, with processing time so low you don't even need to count it, as it's in line with network jitter. Just add the cycle times of both networks to get the total transfer time.
- ✓ **Diagnostics and support**  
The user interface shows connection status, allowing you to monitor data going through the gateway. Monitor and control nodes via the Live List and Data Exchange Control features. Our global support team is ready to help if needed.
- ✓ **Secure and segment networks**  
Secure boot blocks malware, while a security switch locks configurations to prevent unauthorized changes. Network segmentation is inherent in the design, as each network is run separately, with only configured data transferred between networks.
- ✓ **Transfer 1500 bytes to and from Modbus RTU controller (PLC)**  
Transfer up to 1500 bytes in each direction (3000 bytes total) via RS232/RS485 interfaces with baud rates up to 128,000 bit/s. Modbus RTU Server (slave) supporting Modbus diagnostics and device identification.
- ✓ **Configure via web interface over Ethernet**  
With a graphical and responsive web interface, configuration is a breeze. In addition, there's no software to install and the dedicated Ethernet configuration port makes it easy to get started.
- ✓ **Drop-in replacement**  
Already using an X-gateway? Don't worry, with legacy mode you can continue using the same device description file in your controller/PLC.
- ✓ **Built for factory floors**  
The Gateway is made with industrial-grade components, verified to meet industry standards, and backed by a 5-year warranty. Its slim form factor, front-facing ports, and cable tie make DIN-rail installation easy.

# Anybus Communicator - Ethernet/IP Scanner to Modbus RTU Server



General	
Net Weight (g)	150
Packed Width (mm)	35
Packed Height (mm)	170
Packed Depth (mm)	115
Packed Weight (g)	185
Operating Temperature °C Min	-25
Operating Temperature °C Max	70
Storage Temperature °C Min	-40
Storage Temperature °C Max	85
Current Consumption Type Value at Vcc Nom (mA)	90mA @ 24V DC (2.2W)
Current Consumption Max value at Vcc nom (mA)	125mA @24V DC (3W)
Input Voltage (V)	12-30V DC
Power Connector	3-pin, 5.08 Phoenix plug connector
Reverse Polarity Protection	Yes
Short Circuit Protection	Yes
Isolation	Yes
Mounting	DIN-rail (EN 50022 standard)
Housing Materials	PC ABS, UL 94 VO
Packaging Material	Cardboard

# Anybus Communicator - Ethernet/IP Scanner to Modbus RTU Server



## Identification and Status

Product ID	ABC3310-A
Model Code	40-SER-ETH-B
Predecessor	AB7678-F
Country of Origin	Sweden
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN)	5A991.b.1

## Physical Features

Connectors / Input / Output	1x 7-pin, 5.08 Phoenix plug connector; 2x RJ45; RJ45 Config port
Push Buttons	Factory reset
DIP & Rotary Switches	Security lock switch
Contains Battery	No

## EtherNet/IP Features

EtherNet/IP Mode	Scanner / Master
EtherNet/IP Supported Functionality	EDS import; Endian conversion (byte swap); LiveList; DataExchangeControl; QoS; CT20 ODVA Conformance
EtherNet/IP No. Of Adapters	32
EtherNet/IP Configuration File	EDS available
EtherNet/IP Bandwidth	10/100MBit down to 1ms cycle time
EtherNet/IP Input Data Size	1500 bytes
EtherNet/IP Output Data Size	1500 bytes

## Modbus-RTU Features

Modbus-RTU Mode	Slave mode
-----------------	------------

# Anybus Communicator - Ethernet/IP Scanner to Modbus RTU Server



## Modbus-RTU Features


Modbus-RTU Supported Functionality	RS-232; RS-485; Endian conversion; 8 data bit; None, Odd, Even Parity; 1 or 2 stop bit; ABX compatible mode
Modbus-RTU Functions Supported	1, 2, 3, 4, 5, 6, 8, 15, 16, 22, 23, 43/14
Modbus-RTU Baud Rate	1200,1800,2400,4800,7200,9600,14400,19200,35700,38400,57600,115200,128000 bit/s
Modbus-RTU Input Data Size	1500 bytes
Modbus-RTU Output Data Size	1500 bytes

## Certifications and Standards

Protection Class IP	IP20
RoHS Compliant	Yes
Recycle / Disposal	Yes
CE	Yes
FCC	No
UL	Yes
UL Information	E214107: Ord.Loc UL 61010-1, CSA C22.2 No. 61010-1, UL 61010-2-201, CSA C22.2 No. 61010-2-201
KC	Yes
EMC	Yes
Environment	EN 55016-2-3 Class A, EN 55032 Class A, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6
Waste Certification (WEEE)	Yes



## Use Case

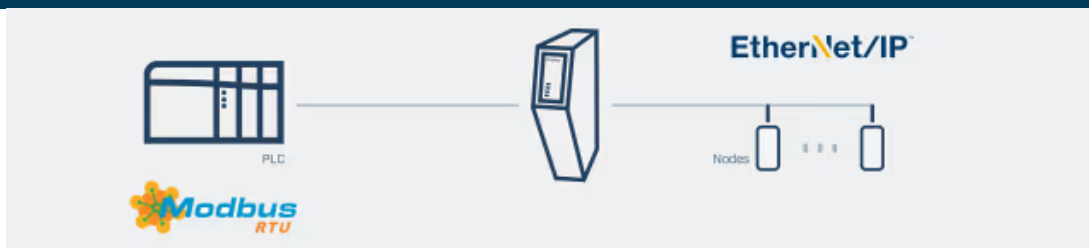

The Anybus Communicator EtherNet/IP scanner to Modbus RTU server enables you to connect any EtherNet/IP device to Modbus RTU control systems.