

York VRF systems to BACnet/IP & MS/TP Application

Item number: IN770YRKXXSO000

The York application allows bidirectional control and monitoring of York VRF systems from a BMS, SCADA, PLC, or any controller working as a BACnet/IP server or a BACnet MS/TP client. This solution allows the integration of up to 4 indoor units.



York to BACnet/IP & MS/TP - Up to 4 Indoor Units

Features and benefits

- ✓ **Compatible with any network**

The gateway supports both BACnet/IP and BACnet MS/TP protocols.
- ✓ **Reduce commissioning time**

Scan the bus and find all the units connected to the HVAC system with their control signals, including outdoor unit indicators.
- ✓ **A gateway for any project's size**

Choose the license that best fits your needs (XXS - 4 indoor units, 00S - 16 indoor units, 00M - 64 indoor units), or upgrade your current license. Your project's dimensions and budget are covered.
- ✓ **Fast and intuitive project configuration**

Intesis MAPS is the user-friendly configuration tool that enables you to maximize the potential of Intesis gateways. Select your template and avoid manual signal mapping.
- ✓ **Minimize the use of installation materials, reduce the installation work**

The gateway is connected directly to the outdoor units' communication bus. One single gateway enables centralized access to the entire HVAC system.
- ✓ **Enable energy efficiency by controlling the building's main consuming asset**

The gateway's Power Estimation Algorithm allows you to estimate the energy consumption of each indoor unit connected to the VRF system.
- ✓ **Avoid compatibility issues**

This gateway is compatible with any York VRF system.
- ✓ **Automatic updates will keep your product high performing**

Both the Intesis MAPS configuration tool and the interface's firmware can receive automatic updates to improve the product's functionality.

York VRF systems to BACnet/IP & MS/TP Application



General	
Net Weight (g)	240
Packed Width (mm)	135
Packed Height (mm)	85
Packed Depth (mm)	140
Packed Weight (g)	310
Operating Temperature °C Min	0
Operating Temperature °C Max	60
Storage Temperature °C Min	-30
Storage Temperature °C Max	60
Power Consumption (W)	127
Input Voltage (V)	For DC: 12 .. 36 VDC $\pm 10\%$, Max: 250 mA For AC: 24 VAC $\pm 10\%$, 50-60 Hz, Max: 127 mA Recommended voltage: 24 VDC, Max: 127 mA
Power Connector	3-pole
Configuration	Intesis MAPS
Capacity	Up to 4 indoor units and up to 16 outdoor units.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway and Installation Manual.
Not Included (in delivery)	Power supply and USB cable not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic

York VRF systems to BACnet/IP & MS/TP Application



General

Packaging Material	Cardboard
--------------------	-----------

Warranty (years)	3 years
------------------	---------

Identification and Status

Product ID	IN770AIRXXSO000_BAC_YRK
------------	-------------------------

Country of Origin	Spain
-------------------	-------

HS Code	8517620000
---------	------------

Dual Usage	No
------------	----

Export Control Classification Number (ECCN)	EAR99
---	-------

Physical Features

Connectors / Input / Output	Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB.
-----------------------------	---

LED Indicators	Gateway and communication status.
----------------	-----------------------------------

Push Buttons	Factory reset. I-Am message (for BACnet only). Normal mode/programming mode switch (for KNX only).
--------------	--

DIP & Rotary Switches	EIA-485 serial port configuration.
-----------------------	------------------------------------

Contains Battery	No
------------------	----

Certifications and Standards

ETIM Classification	EC001604
---------------------	----------

CE	Yes
----	-----

CB	Yes
----	-----

UKCA	Yes
------	-----

UKPSTI	Yes
--------	-----

UL	Yes
----	-----

BTL	Yes
-----	-----




Certifications and Standards

WEEE Category	IT and telecommunications equipment
---------------	-------------------------------------



Use Case

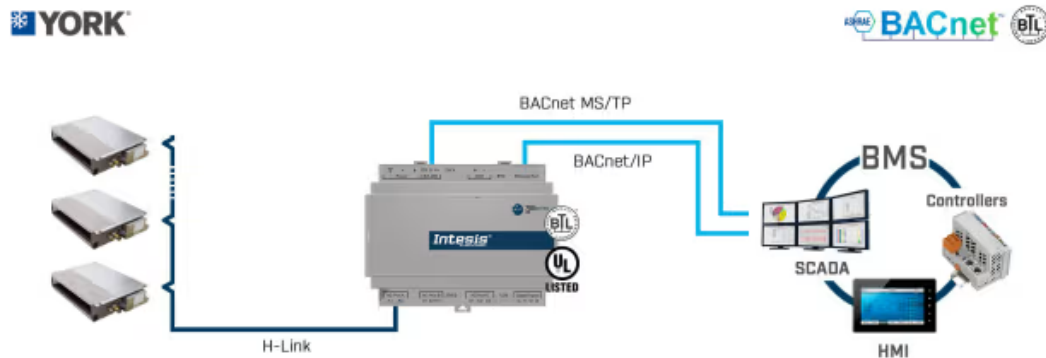

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation